

ARTICLES

DEUTERIUM-TRITIUM RESULTS OF TFTR'S ALPHA COLLECTOR

H.W. HERRMANN, S.J. ZWEBEN, D.S. DARROW, J.R. TIMBERLAKE
Princeton Plasma Physics Laboratory,
Princeton University, Princeton,
New Jersey, United States of America

G.P. CHONG, A.A. HAASZ
University of Toronto, Institute for Aerospace Studies,
Downsview, Ontario, Canada

C.S. PITCHER
Max-Planck-Institut für Plasmaphysik,
Garching, Germany

R.G. MACAULAY-NEWCORBE
McMaster University, Department of Engineering Physics,
Hamilton, Ontario, Canada

ABSTRACT. An escaping alpha collector probe has been developed for the deuterium-tritium (DT) phase of the Tokamak Fusion Test Reactor (TFTR) to complement the results of the lost alpha scintillator detectors, which have been operating on TFTR since 1988. Measurements of the energy distribution of escaping alphas have been made by measuring the range of alphas implanted into nickel foils located within the alpha collector. Exposed samples have been analysed for four DT plasma discharges at plasma currents of 1.0 and 1.8 MA. The results at 1.0 MA are in good agreement with predictions for first orbit alpha loss at 3.5 MeV. The 1.8 MA results, however, indicate a large anomalous loss of partially thermalized alphas at an energy $\sim 30\%$ below the birth energy and at a total fluence nearly an order of magnitude above the expected first orbit loss. This anomalous loss is not observed with the lost alpha scintillator detectors in DT plasmas but does resemble the anomalous 'delayed' loss seen in DD plasmas. Several potential explanations for this loss process are examined. None of the candidate explanations proposed thus far are fully consistent with the anomalous loss observations.

1. INTRODUCTION

Present day tokamaks have begun to utilize the deuterium-tritium (DT) fusion reaction: $D + T \rightarrow \alpha(3.5 \text{ MeV}) + n(14.1 \text{ MeV})$, making possible the experimental investigation of alpha particle behaviour and its effect on thermonuclear plasmas. The Tokamak Fusion Test Reactor (TFTR) has conducted the first such systematic study of alpha particle physics. A crucial aspect of alpha particle physics is the fraction of alphas lost to the first wall. Alphas lost from the plasma prior to their thermalization reduce the self-heating power available to achieve ignition. But, more importantly, in the design of the International Thermonuclear Experimental Reactor (ITER) and future DT reactors it will be necessary to predict the alpha particle losses to the first wall

and divertor plates, since even a few per cent loss may cause damage due to localized heating. Studies of alpha particle loss mechanisms could also prove valuable in developing much needed methods of helium ash removal, burn control and alpha channelling.

TFTR has previously relied on the lost alpha scintillator detectors [1, 2] as the sole escaping alpha diagnostic. In order to provide a complementary measurement of escaping alphas, a new alpha collector sample probe has been developed. The alpha collector probe operates on an entirely different physical principle, i.e. the implantation and subsequent trapping of alpha particles in nickel foils. The primary reasons this detection technique was selected are:

- (a) For its improved energy resolution with respect to the lost alpha scintillators;

- (b) For its inherent ease of absolute calibration, allowing a valuable cross-calibration for the lost alpha scintillators and validation of alpha loss models;
- (c) For its immunity to high neutron fluxes, which may prove useful in ITER and future DT reactors.

The escaping alpha diagnostics (alpha collector probe and lost alpha scintillator detectors) and the conditions of the plasma discharges of interest are described in Section 2. Section 3 discusses the model used to predict first orbit alpha loss. In Section 4, the results of the alpha collector are compared with the first orbit loss model and the results of the lost alpha scintillators. Section 5 considers possible explanations for the anomalous results, and in Section 6 a summary and conclusions are presented.

2. ESCAPING ALPHA DIAGNOSTICS

While the focus of this study is alpha loss observations of the alpha collector probe, it is useful to compare these observations with those of the lost alpha scintillator detectors. It is therefore necessary to compare the detection techniques and relative locations of the various detectors. Section 2.1 covers the details of the alpha collector including its positioning relative to the nearest scintillator detector, and the conditions under which the exposures were conducted. Section 2.2 presents a brief description of the lost alpha scintillator detectors.

2.1. Alpha collector probe

2.1.1. Detection technique

The alpha collector probe [3–5] is based on the foil deposition technique originally proposed by Langley [6]. Similar methods have been previously used on TFTR to collect DD fusion produced tritons [7], and on the Joint European Torus (JET) to collect ^3He ions accelerated by ion cyclotron resonance heating (ICRH) [8, 9]. In the current TFTR implementation of this technique, escaping alpha particles whose trajectories intercept the detector are implanted into a stack of nickel foils consisting of ten layers of $1\ \mu\text{m}$ thick foil. This is sufficient to stop DT fusion alphas at 3.5 MeV, which have an expected penetration range of $\sim 6\ \mu\text{m}$ in nickel [10]. The alpha particles form a

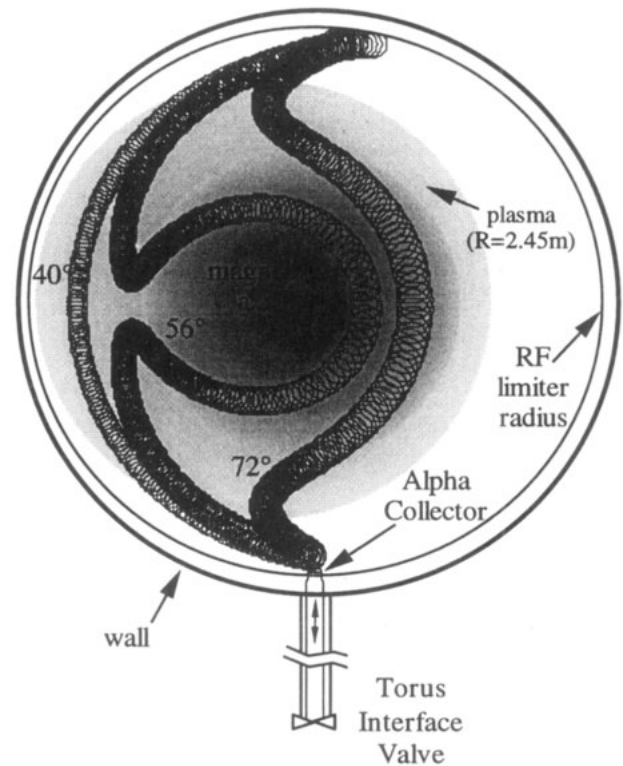


FIG. 1. Poloidal cross-section of TFTR illustrating a co-going passing particle ($\chi_t = 40^\circ$, where χ_t is the toroidal pitch angle at the detector), a trapped particle at the fattest banana orbit ($\chi_t = 56^\circ$) and a deeply trapped orbit ($\chi_t = 72^\circ$) that strike the alpha collector probe located at the bottom of the vessel for a 1.8 MA plasma. Once exposed, the probe is lowered below the torus interface valve so that it can be isolated and removed.

distribution of implantation ranges in the foil stack that is dependent on their incident angles and energies. Once the alphas are stopped in the nickel, they are trapped and remain immobile as long as the nickel remains below a critical temperature of $\sim 400^\circ\text{C}$ [11].

The foils are removed from the TFTR vacuum vessel after exposure to the alpha fluxes of one or more discharges. They are then analysed for helium content by melting the foils one at a time in an off-site vacuum chamber (located at the University of Toronto), thus releasing the helium, and measuring the partial pressure of helium with a residual gas analyser [3, 12]. The alpha energy spectrum is then inferred from the range distribution of helium in the nickel foil stack. Calibration implants of known energies and total fluences from a Van de Graaff accelerator and from a sealed ^{241}Am alpha source have been used to check the accuracy of the implantation model (Section 3) and of the sample analysis method [12].

2.1.2. Geometry of TFTR

Figure 1 depicts a poloidal cross-section of TFTR, showing the exposure position of the alpha collector probe at the bottom of the vessel, and the poloidal projection of the radiofrequency (RF) limiters. TFTR has nine carbon poloidal RF limiters of varying poloidal extents, to protect the RF launchers. They are centred at a major radius of 261 cm and have a minor radius of 99 cm.

After exposure to one or more discharges, the probe is lowered remotely and isolated from the TFTR vacuum vessel by closing the torus interface valve shown in Fig. 1. The probe chamber can then be vented and the probe head removed through a six inch flange. The exposed nickel foils are then removed for analysis [12] and replaced with new foils. Also shown in Fig. 1 are various alpha particle orbits that strike the detector for a 2.45 m major radius plasma with a plasma current of 1.8 MA. These orbits will be discussed in more detail in Section 3.

The alpha collector and the lost alpha scintillator detectors are located in adjacent bays separated by one of the 20 toroidal field (TF) coils, placing them 18° apart toroidally. The major radii of the alpha collector probe and of the 90° scintillator detector are 262.5 and 259.2 cm, respectively, placing each of them within 2 cm of the major radius of the RF limiter centre.

Particles intercepting the 90° lost alpha scintillator detector on co-going (in relation to the plasma current) orbits have 45° of toroidal clearance between the centre of the nearest RF limiter and the detector. Particles intercepting the alpha collector on co-going orbits, however, only have 9° of toroidal clearance, making it necessary to position the probe closer to the plasma to avoid shadowing of these orbits by the limiter. This is essential for detection of first orbit loss, since the majority of this loss occurs on the co-going leg of trapped banana orbits such as the 56° and 72° orbits depicted in Fig. 1. Orbits near the 56° 'fattest banana' dominate first orbit loss because they pass closest to the magnetic axis, where the alpha source rate is peaked.

Figure 2 shows the alpha collector and the nearest RF limiter as seen when looking towards the centre of the torus. This figure depicts a co-going alpha particle orbit entering a collimating port on the detector. Alpha particles can enter any one of a series of 16 collimating ports that are separated into two rows on the cylindrical probe head. At the back of each port is the 10 layer stack of $1\ \mu\text{m}$ thick nickel foils into which

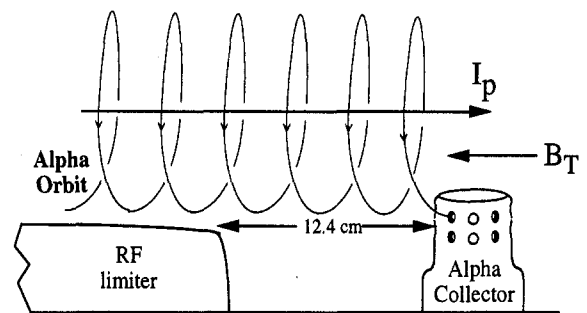


FIG. 2. Side view (looking in towards centreline of TFTR) of the alpha collector probe head, depicting a co-going alpha particle entering one of the 16 collimating ports.

the alpha particles implant. Each port only accepts particles within a particular range of pitch angles.

The edge of the probe and the RF limiter are separated toroidally by 12.4 cm. The probe was placed in the same position for each exposure, placing the centre of the upper row of collimating ports ~ 0.5 cm radially inward from (i.e. above) the nearest limiter, and the lower row ~ 0.6 cm radially outward from (i.e. below) the limiter. This was sufficient to avoid shadowing of first orbit loss at 3.5 MeV to both rows, as will be shown in Section 4.4. The top of the lower row of collimating ports was only ~ 0.3 cm below the RF limiter. The larger toroidal separation for co-going orbits between the nearest RF limiter and the 90° scintillator detector allows its 0.1 cm high pinhole aperture to be placed ~ 1.2 cm below the RF limiter [2], or ~ 0.9 cm below the top of the lower row of the alpha collector.

2.1.3. Probe head design

Two separate alpha collector probe head designs were used. A cross-section taken through the middle of a row of collimating ports is shown in Fig. 3(a) for the original design and in Fig. 3(b) for the redesigned probe head. In the original design, the nickel foil is wrapped around a 3.175 cm diameter graphite cylindrical spool that fits inside the carbon fibre composite outer shell of the probe head. The original design has ports of 0.635 cm in width (w) and depth (d), whereas the redesign has $w = 0.635$ cm, but has twice the port depth at $d = 1.27$ cm. These port dimensions allow high energy particles with trajectories within $\pm 45^\circ$ of a port's axis to strike the foils in the original design, but an acceptance range of only $\sim \pm 27^\circ$ for the redesign, which improved the pitch angle resolution.

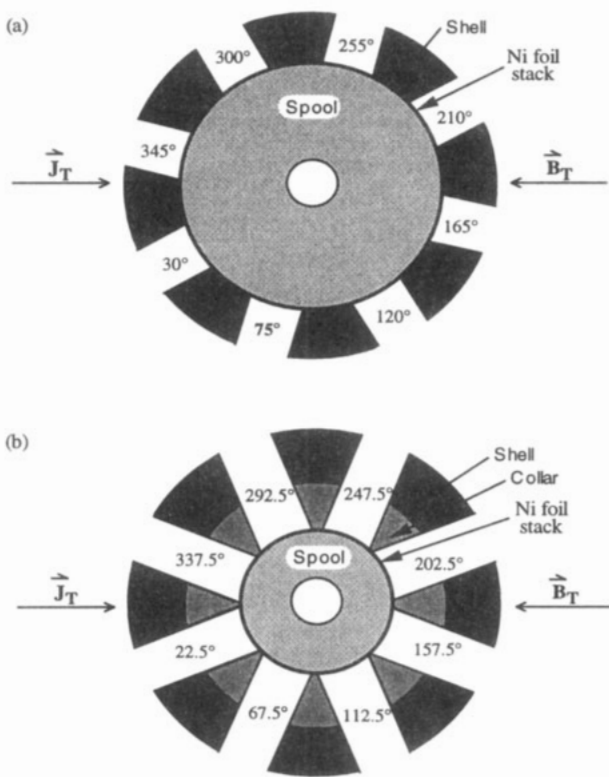


FIG. 3. Midplane cross-section of a row of collimating ports for (a) the original design and (b) the redesigned alpha collector probe head. The stack of 10 layers of $1\ \mu\text{m}$ nickel foil is wrapped onto the inner spool, which is then inserted into an outer shell. Cylindrical 0.635 cm diameter holes drilled into the 0.635 cm thick outer shell make up the collimating ports. The collimator depth is extended to 1.27 cm in the redesigned head of (b) by inserting a cylindrical 0.635 cm thick collar that also has 0.635 cm diameter holes drilled into it. The spool diameters are: (a) 3.175 cm and (b) 1.905 cm.

Each row of collimating ports has eight evenly spaced ports placed 45° apart. The orientation of each port is labelled in Fig. 3 with respect to the toroidal direction (0° corresponding to the collection of co-going particles). The redesigned head was rotated with respect to the original probe head by 7.5° clockwise when viewed from above. This was to line the probe head up with the scintillator detector which is oriented along 67.5° . For convenience, the orientations of the original design will be referred to when discussing the probe in general (subtract 7.5° to obtain the redesign orientations).

2.1.4. DT exposures

The alpha collector has been exposed to a total of five DT discharges. Plasma parameters for these five discharges, labelled A to E, are given in Table I. These

discharges were conducted at low neutral beam injection (NBI) power to avoid MHD activity, so that first orbit loss was expected to be the dominant loss mechanism. The power was also kept low to avoid probe overheating, although thermal design considerations do allow its use in high power discharges with plasmas as large as $R = 2.52\ \text{m}$.

Exposure A, which was actually exposed to two identical discharges, resulted in melting of a majority of the foils, possibly due to excessive beam ion loss [3]. The exposure A foils were not analysed for helium content because of the excessive heat damage. Beam ion loss is highly dependent on the direction of beam injection. For example, the calculated prompt first orbit loss of neutral beam ions ranges from 30 to 38% (depending on the beam tangency radius) for counter-injection, and only 0 to 1% for co-injection, for a 2.6 m major radius plasma at a plasma current of 0.9 MA [13]. To reduce the potential for beam ion loss, all subsequent exposures were conducted using co-going only NBI.

Exposures B through E suffered only minimal foil heat damage, and only in ports that had a direct line of sight to the magnetic field on the side opposite the nearest RF limiter. This corresponds to the ports at 165° and 210° . Thermal plasma could flow along field lines unimpeded to the foils in these ports. These four samples (i.e. the upper and lower rows of the 165° and 210° ports) were not analysed for this reason.

Exposures D and E made use of the redesigned probe head. To minimize overheating of foil samples, the redesign incorporated the deeper collimating ports that could exclude small gyroradius beam ion loss to the foils in the 67.5° port through better collimation, while still allowing large gyroradius fusion produced alphas to implant into these foils [3]. The redesign has not been evaluated during the use of counter-going beams to see if foil heat damage can be avoided.

2.2. Lost alpha scintillator detectors

Four scintillator detectors are installed on TFTR to detect fusion product losses to the wall [1, 2]. While these detectors were designed to detect alpha particles, they are also capable of detecting the 'alpha-like' DD fusion products (i.e. 3 MeV protons and 1 MeV tritons). These detectors are installed at various poloidal angles below the outer midplane (20° , 45° , 60° and 90°) and are all at the same toroidal angle. Each detector consists of a pinhole and slit collimator designed to disperse fusion products along

Table I. Parameter List

Exposure	A	B	C	D	E
Probe head	Original	Original	Original	Redesign	Redesign
Shot	73319/73320	74 796	76 014	80 553	84 593
I_p (MA)	0.6	1.8	1.0	1.8	1.0
R_0 (m)	2.45	2.45	2.45	2.45	2.45
B_t (T)	4.75	4.75	4.88	4.87	4.88
P_b (MW)	5.2	10.2	9.4	12.7	11.1
t_b (s)	3.0–3.7	3.0–3.7	3.0–3.7	3.0–4.0	3.0–3.7
S_n (10^{17} n)	0.6	1.3	1.1	4.3	1.8
n_{e0} (10^{13} cm $^{-3}$)	—	4.6	3.1	4.2	3.6
T_{e0} (keV)	—	6.1	5.8	7.4	6.4
τ_{sd0} (s)	—	0.21	0.29	0.30	0.28

a rectangular scintillator according to gyroradius ρ (depending on their energy) in one dimension and pitch angle χ (depending on their magnetic moment) in the other. The visible light from ion impacts on the scintillator is imaged onto a shielded charged coupled device (CCD) camera and a series of photomultiplier tubes (PMTs). A detector analysis code determines a (ρ, χ) grid that is used to interpret the camera images. For this grid, the ρ co-ordinate is the centroid of the predicted scintillator impacts for an ion of gyroradius ρ_0 (the gyroradius the ion would have if all its energy were put into perpendicular motion) and the χ co-ordinate is the orbit's toroidal pitch angle χ_t measured locally with respect to the co-going toroidal field direction at the detector. Specifics on the design and use of the lost alpha scintillators can be found in Refs [1, 2].

The alpha collector results are compared to measurements made with the lost alpha scintillator detector located 90° below the outer midplane (i.e. at the bottom of the vessel where the alpha collector is also located). Although these two probes are close to one another (toroidally separated by ~ 83 cm), the proximity of RF limiters capable of shadowing the detectors from alpha loss is different (Section 2.1.2).

3. FIRST ORBIT LOSS MODEL

First orbit loss is the loss associated with particles born on orbits that intersect the wall on their first bounce (i.e. before completing a poloidal transit). These particles are lost with very nearly their birth energy since the time for one bounce ($< 10 \mu\text{s}$) is much less than the collisional slowing down time

($\tau_{sd} \approx 200$ ms energy e-folding time) [14]. Thus, the energy of first orbit loss particles should be ~ 3.5 MeV with a Doppler spread of up to $\sim \pm 0.5$ MeV caused by the beam-target and beam-beam reactions [1, 15]. This prompt loss follows the neutron signal very closely in time since for each neutron produced by fusion, an alpha is also produced. The global fraction of particles that are first orbit lost decreases with increasing plasma current. This is due to the reduced banana widths of trapped particles at higher current, resulting in a particle staying closer to a given flux surface and thus further from the walls.

3.1. Pitch angle distribution

First orbit loss can be calculated using the PPPL's Lorentz ORBIT code [16]. The Lorentz ORBIT code integrates the Lorentz force equation to trace a single charged particle's trajectory. Figure 1 shows some typical orbits at various pitch angles that strike the alpha collector. The orbit at a pitch angle of 40° is a co-going passing orbit, whereas the other two orbits are trapped orbits. The orbit at a pitch angle of 56° corresponds to the fattest banana orbit (i.e. at the passing-trapped boundary) and passes closest to the magnetic axis where the alpha source profile is peaked, thus giving the largest contribution to first orbit loss.

By integrating the source profile along particle orbits backwards in time from the detector through the plasma and taking into account the detector area and solid angle, the code calculates the expected collection fraction (alphas/neutron) and pitch angle distribution of first orbit loss striking the detector. The collection fraction is simply the fraction of the total

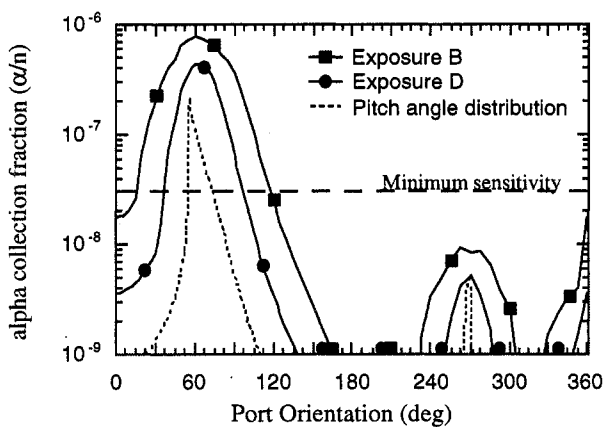


FIG. 4. Predicted alpha collection fraction (alphas/neutron) as a function of port orientation for the 1.8 MA exposures using the original (exposure B) and the redesigned probe head (exposure D). The dashed curve represents the expected pitch angle distribution in arbitrary units. The horizontal dashed line at 3×10^{-8} alphas/neutron represents the minimum sensitivity assuming 1×10^{17} global neutron production.

alpha production (equal to neutron production) that is collected by a foil stack inside one of the collimating ports and can be of the order of 10^{-6} alphas/neutron as calculated by ORBIT.

Figure 4 is a plot of the predicted alpha collection fraction for first orbit loss as a function of collimating port orientation for the 1.8 MA exposures calculated using the Lorentz ORBIT code. The squares on the exposure B prediction mark the port orientations of the original probe head design that was used for this shot. Likewise, the circles on the exposure D prediction mark the port orientations of the redesigned probe head. The alpha collection fractions are the detector responses to the local pitch angle distribution of the expected first orbit loss, which is plotted in arbitrary units (dashed curve) for comparison. The peaks of the detector response curves (B and D) are shifted to higher pitch angle with respect to the local pitch angle distribution owing to the asymmetry in this distribution (i.e. the high pitch angle tail). The reduced magnitude (by $\sim 45\%$ at the 60° peak) of the exposure curve D with respect to the exposure curve B in Fig. 4 is the result of reduced alpha collection associated with the deeper collimating ports of the redesigned head [3].

Since the alpha particles of interest have gyroradii much larger than the dimensions of the collimating port ($\rho \approx 5 \text{ cm} \gg 0.64 \text{ cm} \approx w$), their paths inside the port can essentially be thought of as straight lines. Thus an alpha striking the foil surface in the original

probe head design, in which the port's depth (d) and width (w) are equal (0.635 cm), can have a maximum angle of incidence, $\alpha_{\max} = \tan^{-1}(w/d)$, of 45° . This maximum angle of incidence translates to a $\pm 45^\circ$ pitch angle acceptance range about the orientation of the collimating port axis. The maximum angle of incidence for the redesigned head, in which $d = 2w$, is 26.6° .

The detector response for inboard facing (towards the centreline of the torus, i.e. 180 to 360°) ports in Fig. 4 lies below the minimum sensitivity, illustrated by the horizontal dashed line, estimated for a 1×10^{17} total neutron production (for increased neutron production, the minimum sensitivity in alpha collection fraction is reduced). This is because an alpha particle undergoing left handed gyromotion about the magnetic field (see Fig. 2) must approach the probe head from beneath in order to enter an inboard port and is thus much more likely to be scraped off by the RF limiter before reaching the probe. Only particles with a pitch angle very close to 90° can intercept the inboard side of the detector, since they travel nearly straight down (e.g. ripple well trapped particles) and can avoid limiter scrape-off. These particles are represented by the peaks centred at the 270° port position. However, these particles would most likely be shadowed by the probe head itself before they could enter a collimating port, an effect that is not taken into account in this simulation. Thus, it is expected that inboard facing ports would not collect significant quantities of escaping alphas.

Since an alpha is produced for each neutron, the calculated collection fraction is converted to the expected alpha fluence by multiplying by the global neutron production. The code's accuracy is highly dependent on the assumed source and current profiles, as is discussed in Section 4.5. These profiles are generally obtained from the transport code, TRANSP [17], which takes inputs from various diagnostics to generate time dependent plasma parameters.

3.2. Range distribution

The Lorentz ORBIT code predicts the total fluence and the pitch angle distribution to a detector. However, to determine the range distribution of alphas in the nickel foils it is necessary to determine the angle of incidence distribution of alphas on the foils. The conversion from pitch angle distribution to incident angle distribution is accomplished using an auxiliary code called PORT developed specifically for this

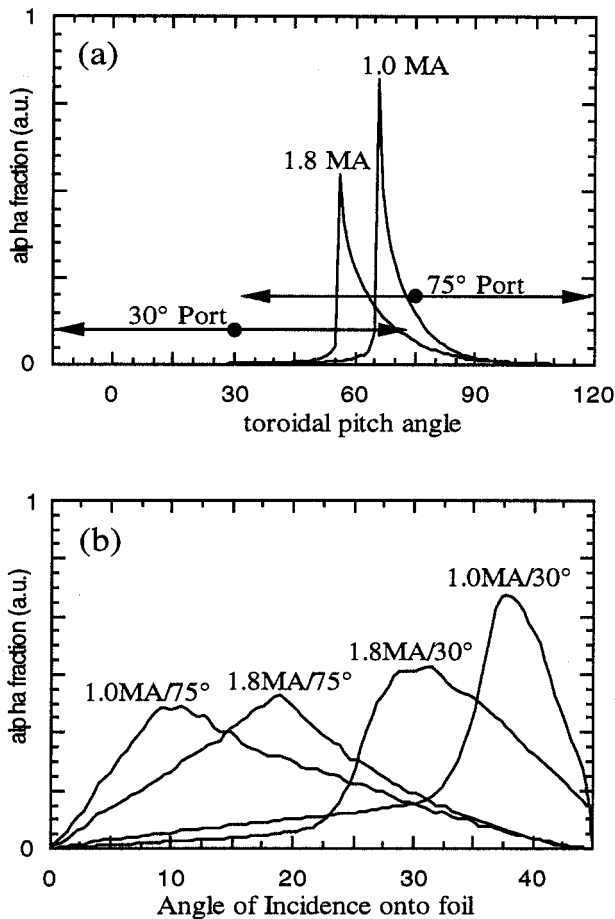


FIG. 5. (a) Toroidal pitch angle distributions in arbitrary units calculated by the Lorentz ORBIT code for 3.5 MeV alphas from exposures B (1.8 MA) and C (1.0 MA). The $\pm 45^\circ$ acceptance range of the original probe design is depicted for the 30 and 75° ports. (b) The resulting angle of incidence distributions for the 30 and 75° ports calculated by PORT for the pitch angle distributions shown in (a).

detector. PORT launches particles from a grid on the foil surface of each port at various pitch angles and gyro-phases, weighted by the ORBIT calculated pitch angle distribution. Particle drifts, such as ∇B and curvature drift, are ignored since the particles are generally tracked for less than one gyro-orbit to determine if they clear the probe head. Thus, a particle orbit is a simple helix about the magnetic field vector, defined by the particle's gyroradius ρ and pitch angle, $\chi = \cos^{-1}(v_{\parallel}/v)$, where v is the particle's velocity and v_{\parallel} is the parallel velocity component along the magnetic field. The magnetic field at the probe location (i.e. at the bottom of the vessel) is assumed to lie in the horizontal plane (i.e. parallel to the midplane) and to make an angle χ_{bt} with the toroidal direction determined by $\chi_{bt} = \tan^{-1}(B_p/B_t)$, where B_p is

the poloidal field and B_t is the toroidal field at the alpha collector. PORT assumes that the first orbit loss to a detector port is independent of gyrophase (good to within $\sim 20\%$ as determined by ORBIT) and that the foil surface is flat. If a particle clears the port walls and the probe head, it is counted and its angle of incidence, α (0° corresponding to normal incidence), is determined by taking the scalar product between the particle's velocity vector at the foil surface and a unit vector along the axis of the collimating port and is found to be

$$\cos \alpha = \cos \chi \cos \chi_0 + \sin \chi \sin \chi_0 \cos \gamma.$$

Here χ is the particle's local pitch angle (0° being along the magnetic field in the direction of the plasma current), χ_0 is the angle between the magnetic field and the axis of the collimating port and γ is the gyrophase of the particle at the foil (0° corresponding to the bottom of a gyro-orbit). Figure 5 shows the conversion of 1.0 and 1.8 MA ORBIT calculated pitch angle distributions for 3.5 MeV alphas to incident angle distributions for a 30° and a 75° port using PORT. Notice that the 1.8 MA pitch angle distribution of Fig. 5(a) has a peak at 56° corresponding to the fattest banana orbit, which was depicted in Fig. 1, since it passes closest to the magnetic axis where the source profile is peaked.

Once the distribution of incident angles onto the foil is determined using the PORT code, the range distribution of 3.5 MeV first orbit lost alphas can be determined using IBM's TRIM-95 code [10]. The TRIM code uses a Monte Carlo algorithm to calculate the penetration of ions into solids. Figure 6(a) shows the TRIM calculated range distributions for helium ions at various energies into nickel at normal incidence. The standard deviation of the range distribution, known as straggling, is $\sim 0.2 \mu\text{m}$ at 3.5 MeV. The relative magnitude of the distribution peaks decreases with increasing energy as the straggling increases, keeping the area under each curve constant. Discarding the first layer, to minimize tritium contamination, results in a minimum detection energy of ~ 0.5 MeV.

Figure 6(b) shows the TRIM-95 calculated range distributions for helium ions at 3.5 MeV into nickel at various angles of incidence. The widths of the range distributions increase with incident angle because transverse straggling is more significant than longitudinal straggling. These distributions are combined with the predicted incident angle distributions to

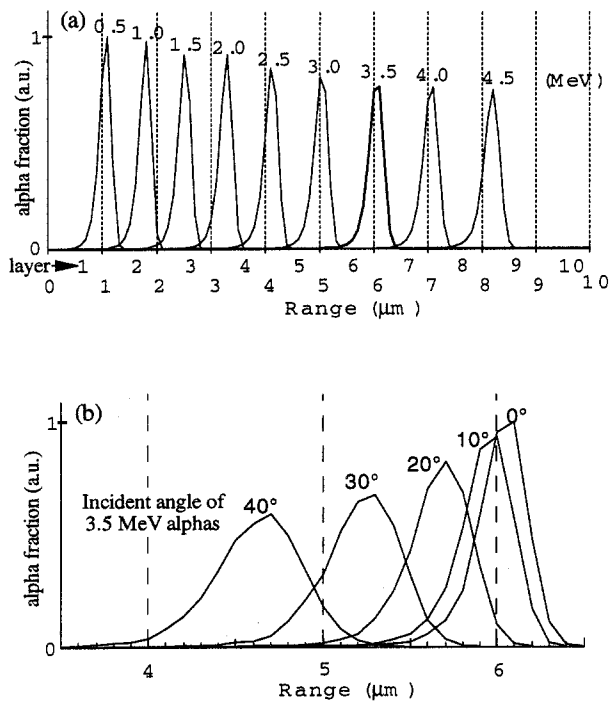


FIG. 6. (a) Implantation range distributions for mono-energetic alpha particles implanted into nickel at various energies and at normal incidence as calculated by the TRIM-95 code. The boundaries between the 1 μm thick foil layers are depicted by the dashed lines. (b) Implantation range distributions for 3.5 MeV alpha particles implanted into nickel at various angles of incidence.

obtain the expected range distribution for first orbit loss in each nickel foil stack.

The foils are actually curved, since they are wrapped around a cylindrical spool inside the probe head. This curvature can cause particles to strike the foil at larger incident angles than if the foil were flat, resulting in a more shallow implantation range. However, this curvature can only be responsible for spreading of the first orbit loss range distribution to, at most, one foil layer shallower. It has little effect on the position of the peak in the range distribution. This effect is neglected along with other spreading effects such as non-uniformities in foil thickness, which may be responsible for the spreading of calibration sample results seen in Ref. [12], and Doppler broadening of the birth energy distribution. These effects taken together can be expected to spread the depth distributions of first orbit loss by one foil layer in either direction.

In the next section, the first orbit loss model predictions generated through the use of ORBIT, PORT and TRIM are compared with alpha collector measurements of DT plasmas.

4. EXPERIMENTAL RESULTS

In each part of this section, a characteristic of the observed loss is compared with the first orbit loss model first for the two exposures conducted at a plasma current of 1.0 MA (exposures C and E), and then for the two exposures conducted at 1.8 MA (exposures B and D). A comparison is then made with the lost alpha scintillator images for each exposure.

Exposures B through D are nominally identical discharges, with the exception of the two values of plasma current and slight modifications that can be seen in Table I. Note that exposures B and C used the original probe head, and exposures D and E used the redesigned head with collimating ports that were twice as deep, and the head rotated clockwise 7.5° (see Section 2.1.3).

When a fluence measurement is compared with the first orbit model only the summed fluence of foil layers 4 through 9 is included. Owing to the geometry of the collimating ports and the predicted range distribution of 3.5 MeV alphas (Fig. 6), it is to be expected that essentially no first orbit lost alpha will be stopped by foil layers shallower than 3 μm , nor penetrate deeper than 9 μm . Layers 1 through 3, and 10 were therefore excluded from comparisons against first orbit loss since helium in these layers must be due to other sources, such as thermalized alpha ash or externally introduced helium puffs.

Analysis of foils from the inboard facing ports (towards the centre of the torus) resulted in levels of implanted helium below or near the minimum sensitivity ($\sim 5 \times 10^8$ alphas). This was as expected for the reasons discussed in Section 3.1. Therefore, only the outboard facing ports are compared with the first orbit loss model in this section. Although there was essentially no helium implanted in these inboard facing samples, it was important to obtain these results to verify expectations and to provide additional insight into any anomalous results that may be obtained.

4.1. Absolute fluence

4.1.1. Absolute fluence at $I_p = 1.0$ MA

Figure 7 shows a comparison between the observed fluences (in number of alphas collected) to the upper and lower rows of outboard facing ports (30, 75, 120°) at 1.0 MA (exposures C and E) and the first orbit

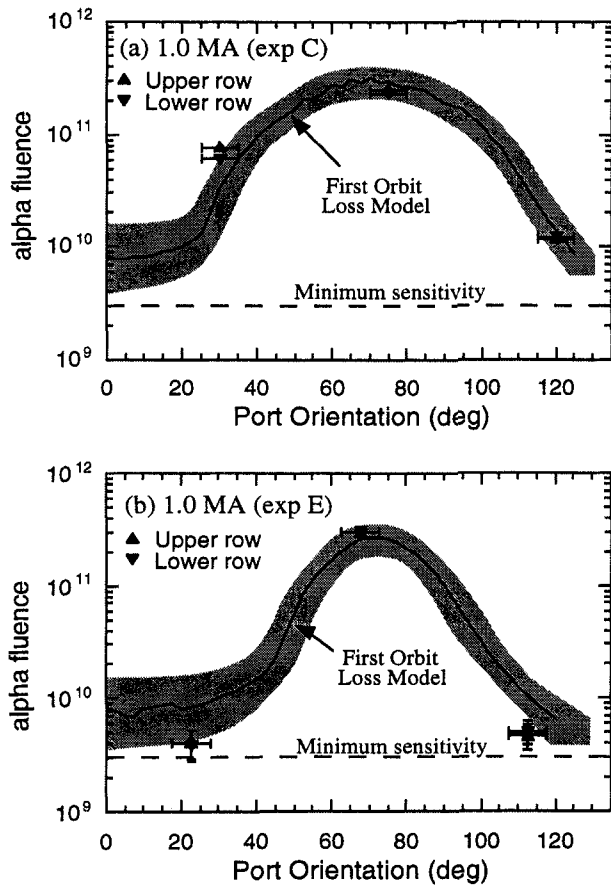


FIG. 7. Measured fluences of helium at $I_p = 1.0$ MA in layers 4 through 9 for the upper and lower rows of (a) exposure C using the original probe head design, and (b) exposure E using the redesigned probe head, compared with the first orbit loss model predictions calculated with the Lorentz ORBIT code, as a function of port orientation. The dashed line, representing the minimum sensitivity, is approximated by multiplying the minimum sensitivity per layer (5×10^8 alphas) by six layers. The vertical error for data points above 1.2×10^{10} alphas is $\sim \pm 10\%$, corresponding approximately to the height of the triangular data symbol.

loss model predictions generated with the Lorentz ORBIT code (Section 3) for the upper row as a function of collimating port orientation. The first orbit loss model for the lower row is not plotted because it is essentially unchanged from the model for the upper row. The first orbit loss model curve is the predicted alpha collection fraction (as seen in Fig. 4 for 1.8 MA exposures) times the total neutron production for each shot (Section 3). The observed fluence is plotted for the total helium content of layers 4 through 9. The observed fluence agrees very well with the first orbit loss model, within the uncertainties discussed in Section 4.5.

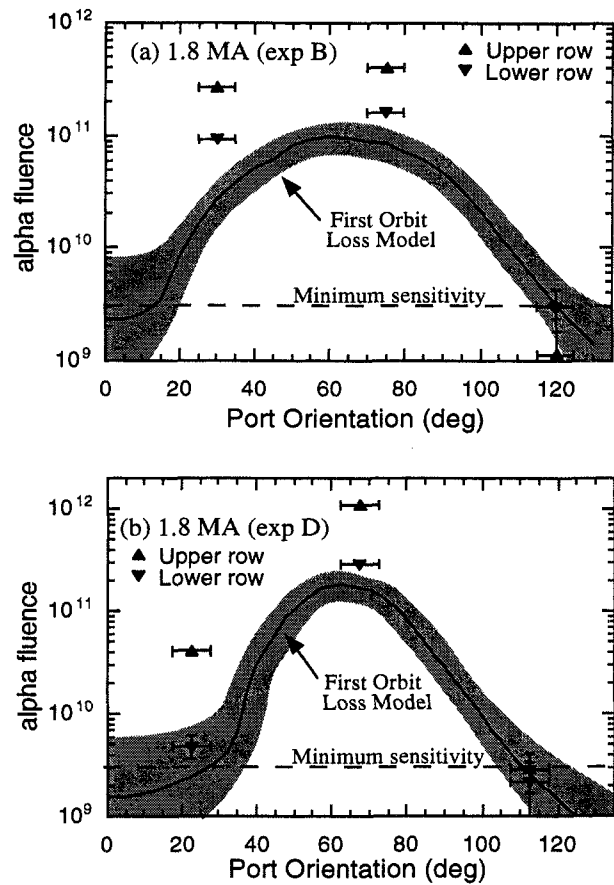


FIG. 8. Measured fluences of helium at $I_p = 1.8$ MA in layers 4 through 9 for the upper and lower rows of (a) exposure B using the original probe head design, and (b) exposure D using the redesigned probe head, compared with the first orbit loss model predictions. The same notation is used as in Fig. 7. The 30 and 75° ports reveal the existence of an anomalous loss at 1.8 MA.

4.1.2. Absolute fluence at $I_p = 1.8$ MA

Figure 8 (analogous to Fig. 7) shows a comparison between the observed fluence and the first orbit loss model predictions at 1.8 MA (exposures B and D). The results for the 30 and 75° ports indicate that an anomalously large loss exists, with an alpha fluence roughly an order of magnitude larger than that which is expected for first orbit loss to the upper rows. This anomalous loss is significantly diminished in the lower rows. The results for the 120° ports, however, appear to be in agreement (keeping in mind that they are near minimum sensitivity) with the first orbit loss model, within the uncertainties discussed in Section 4.5. This indicates that the anomalous loss does not extend to pitch angles as large as does first orbit loss.

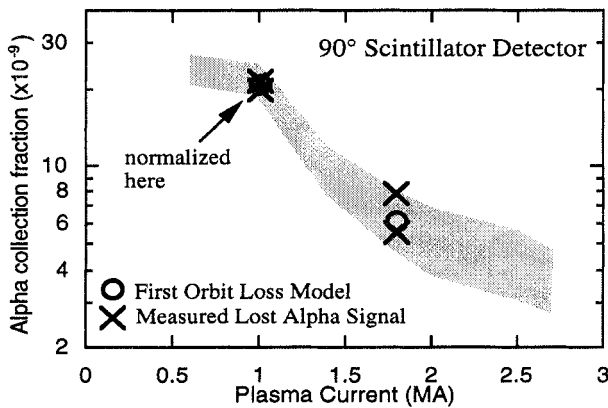


FIG. 9. Plasma current dependence of the alpha collection fraction measured with the 90° lost alpha scintillator detector normalized to the first orbit loss model at 1.0 MA. The shaded region corresponds to the first orbit loss model calculated for $R = 2.52$ m plasmas in Ref. [1], but appears to fit the $R = 2.45$ m data well. The good agreement with the model implies that this detector does not ‘see’ the anomalous loss apparent at 1.8 MA using the alpha collector probe.

The samples with the largest fluence for each of the 1.8 MA exposures, corresponding to the upper 75° port for exposure B and the upper 67.5° port for exposure D, show increases by factors of 4.7 and 6.4, respectively, when the measured fluence in layers 4 through 9 is compared with the predicted fluence for first orbit loss. When the total measured fluence of layers 2 through 10 is compared with the predicted fluence, both of these samples show an increase by a factor of ~ 7 . Assuming that the predicted first orbit loss is included in these measurements makes the anomalous loss ~ 6 times larger than the first orbit loss.

4.1.3. Comparison with lost alpha detector

Figure 9 shows the dependence of the 90° scintillator signal on plasma current for shots B through E. The data are normalized to the model at 1.0 MA, owing to uncertainties in the absolute calibration [1]. The gray area overlaid on this plot is taken from the analysis of Ref. [1]. It represents the first orbit loss model with uncertainties as calculated for $R = 2.52$ m plasmas, but appears to fit the model predictions at $R = 2.45$ m quite well. The magnitude of alpha loss as measured with the 90° scintillator agrees with the first orbit loss model within the uncertainties. There is no increase in the signal at 1.8 MA with respect to the model, consistent with the behaviour observed in all other plasma discharges.

The first orbit loss model predicts a drop in the alpha collection fraction by a factor of ~ 3.4 between 1.0 and 1.8 MA. An anomalous loss causing a factor of 7 increase at 1.8 MA would make the 1.8 MA alpha collection fraction a factor of ~ 2 larger than at 1.0 MA. Hence, it appears that the anomalous loss detected at 1.8 MA with the alpha collector is not seen by the 90° lost alpha scintillator detector.

4.2. Energy distribution

4.2.1. Energy distribution at $I_p = 1.0$ MA

Figure 10 shows a comparison between the measured range distribution and the first orbit loss model predictions of 3.5 MeV alphas generated with the ORBIT, PORT and TRIM codes (see Section 3) for the upper and lower rows of outboard facing ports at 1.0 MA (exposures C and E). There is reasonable agreement between the observed distribution and the model, with the exception of a low energy loss feature appearing in layers 2 and 3 corresponding to an energy below 2.0 MeV. Although the shapes of the peaks lying between layers 4 and 9 do not exactly match those of the first orbit loss model peaks, the important feature is that the peaks appear in approximately the same layers at an overall magnitude determined in Section 4.1.1 to be in agreement with first orbit loss. The disagreement in the specific shape of the distributions may be attributable to the neglect of foil non-uniformities, curvature of the foils and Doppler broadening of the birth energy distribution (see Section 3). Overall, the agreement is sufficient to conclude that the observations are consistent with the model for first orbit loss, with the exception of a low energy loss feature that is not yet understood, but might be related to the anomalous loss at 1.8 MA.

4.2.2. Energy distribution at $I_p = 1.8$ MA

Figure 11 (analogous to Fig. 10) shows a comparison between the measured range distribution and the first orbit loss model for the upper and lower rows of outboard facing ports at 1.8 MA (exposures B and D). The observed peak in the range distribution occurs at a shallower depth and has a significantly larger width than the first orbit loss model for the 30 and 75° ports of exposure B, and the 67.5° port of exposure D (Figs 11(a, b, e)). This indicates that the anomalous loss occurring at 1.8 MA consists of partially thermalized alphas.

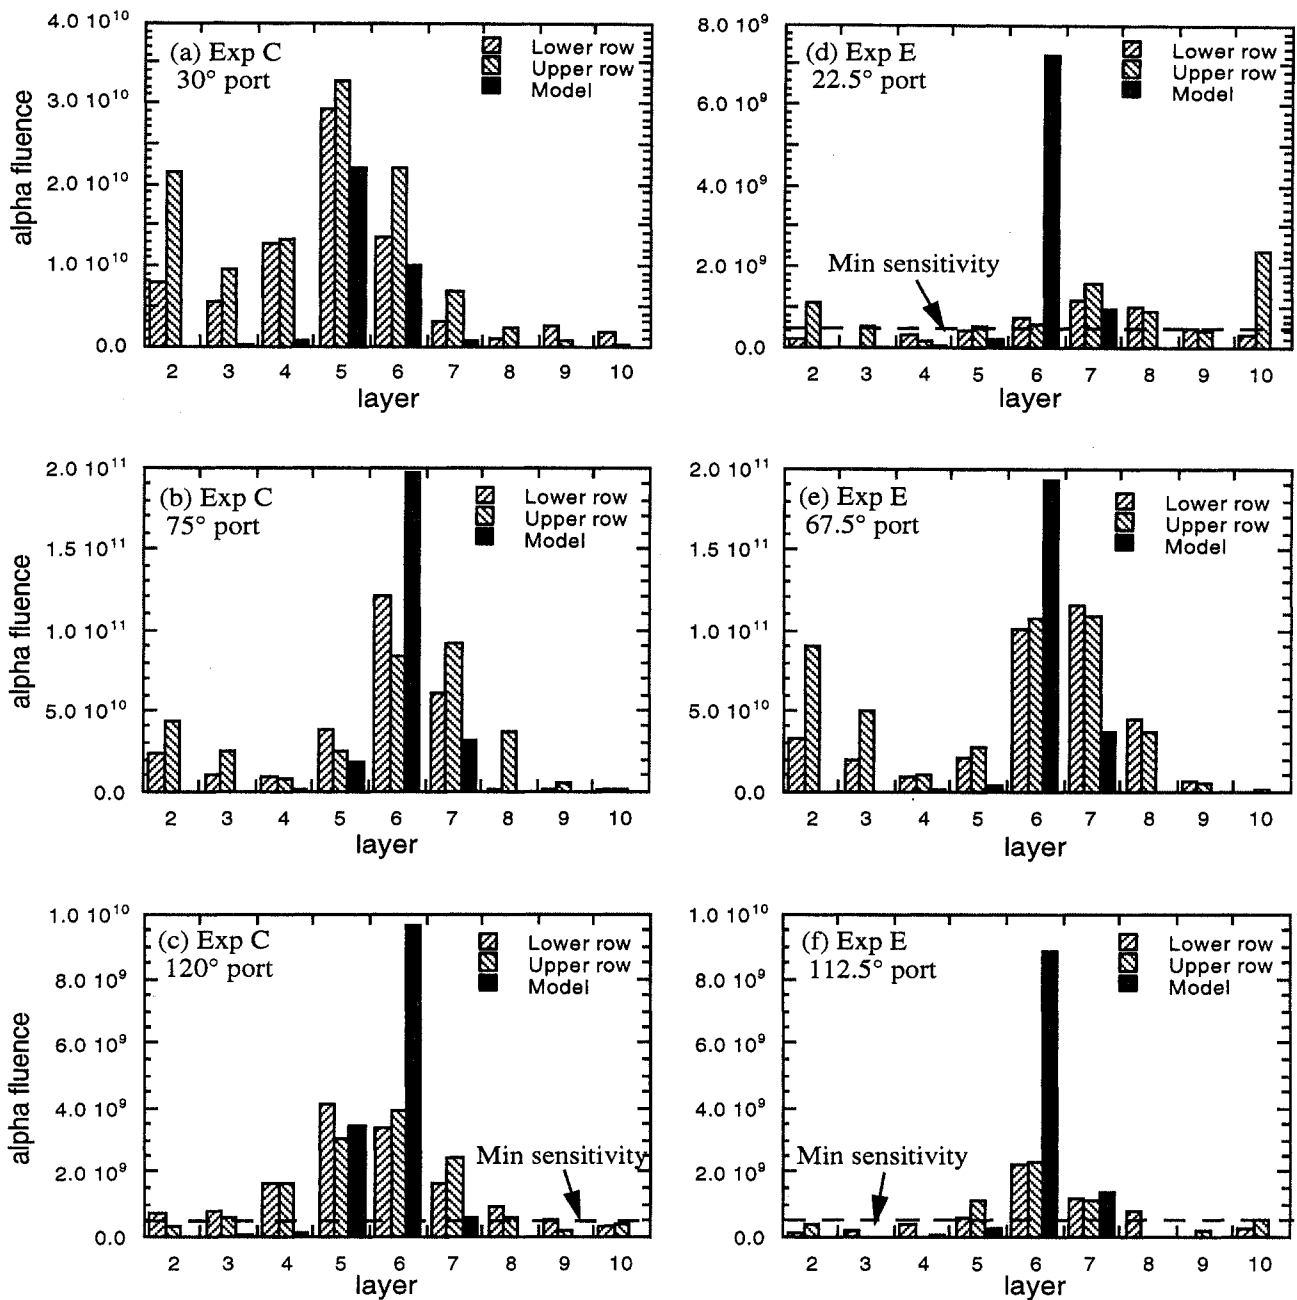


FIG. 10. Implantation range distributions at $I_p = 1.0$ MA as a function of layer (i.e. $1 \mu\text{m}$ bins) for the upper and lower rows and model predictions for (a) 30° , (b) 75° and (c) 120° ports of exposure C, and for (d) 22.5° , (e) 67.5° and (f) 112.5° ports of exposure E. The vertical scales are linear and are not all the same. The plots with a maximum of the vertical scale $\leq 2 \times 10^{10}$ alphas have the minimum sensitivity of the sample analysis ($\sim 5 \times 10^8$ alphas/layer) represented by a dashed line.

The data from the 22.5° ports (upper and lower rows) from exposure D (Fig. 11(d)) seem to indicate an alpha loss near the birth energy and not the partially thermalized loss mentioned above. This is an indication that the partially thermalized anomalous loss does not occur at pitch angles below the maximum pitch angle accepted by this port ($\sim 49^\circ$).

Thus, the observed signal should correspond to purely first orbit loss of passing particles. However, as seen in Fig. 8(b), the total fluence for layers 4 through 9 of the upper 22.5° port was nearly 17 times the expected first orbit loss. The peak in the sixth layer is repeated in the lower row of the 22.5° port, as seen in Fig. 11(d), verifying the lack of a partially

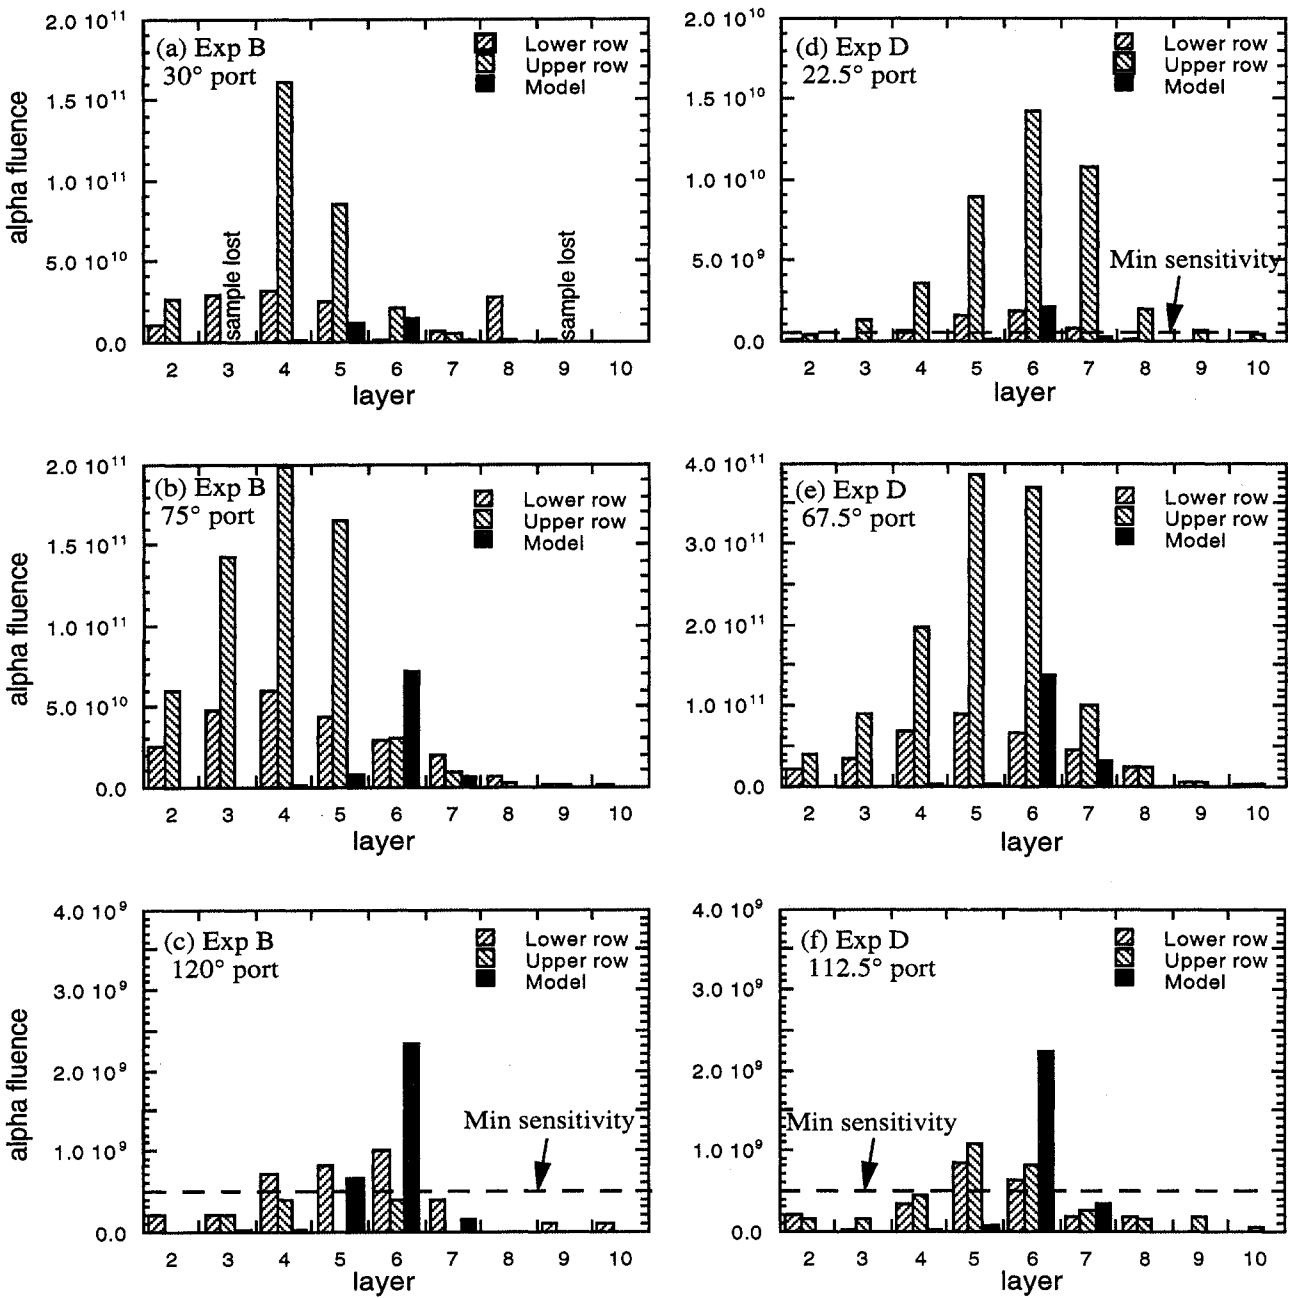


FIG. 11. Implantation range distributions at $I_p = 1.8$ MA as a function of layer for the upper and lower rows and model predictions for (a) 30°, (b) 75° and (c) 120° ports of exposure B, and (d) 22.5°, (e) 67.5° and (f) 112.5° ports of exposure D. The same notation is used as in Fig. 10. Layers 3 and 9 of the upper row of the 30° port of exposure B in (a) were lost during the tritium decontamination process [11].

thermalized loss to this location. Also, the total fluence for the lower row seen in Fig. 8(b) is consistent with first orbit loss. Although there does appear to be an anomalously large signal to the upper row, until this result can be shown to be reproducible it will be assumed that the loss to this port is purely first orbit loss and is not associated with the partially thermalized anomalous loss observed at 1.8 MA. If this is a

valid result, it is associated with a prompt loss mechanism, not the delayed mechanism (allowing for time to slow down) responsible for the partially thermalized anomalous loss.

The peak in the fourth layer of the 75° port of exposure B (Fig. 11(b)) corresponds to an alpha loss energy of $\sim 2.2 \pm 0.3$ MeV (Fig. 6) if normal incidence is assumed. Similarly, the peak in the fifth layer

of the 67.5° port of exposure D (Fig. 11(e)) corresponds to an alpha loss energy of $\sim 2.7 \pm 0.3$ MeV. Exposure D used the redesigned probe head with the improved collimation (i.e. particles implant closer to normal incidence), and thus provides a better indication of alpha loss energy than does exposure B, which used the original design. It might also be inferred from the deeper implantation range in exposure D that the 7.5° clockwise rotation that went into the redesign was such as to bring the axis of the port closer to the pitch angle of the anomalous loss, also allowing particles to implant closer to normal incidence. In other words, the anomalous loss probably occurs at a pitch angle closer to 67.5° than to 75° . Assuming the two 1.8 MA exposures are exposed to an anomalous loss of the same energy, the peak of the energy distribution is inferred to be $\sim 2.5 \pm 0.3$ MeV (i.e. $\sim 70 \pm 10\%$ of the birth energy). In the discussion of Section 5, the anomalous loss at 1.8 MA will be simplified as having a single loss energy of 2.5 MeV.

4.2.3. Comparison with lost alpha detector

The gyroradius distributions for exposures B through E as measured with the 90° lost alpha scintillator detector are shown in Fig. 12. Two model curves, taking into account the finite aperture sizes and optical resolutions of the detectors, are also plotted. The distributions show good shot to shot consistency, independent of the plasma current, and they agree closely with the model assuming alpha loss at a single energy of 3.5 MeV. For comparison with what might be expected if some of the anomalous loss observed with the alpha collector were also detected by the 90° scintillator detector, the other model assumes equal loss components at energies of 2.5 and 3.5 MeV. These distributions provide further evidence that the lost alpha scintillator detectors do not detect the partially thermalized anomalous loss observed with the alpha collector at 1.8 MA, which was inferred to be up to 6 times the first orbit loss at an energy of ~ 2.5 MeV.

4.3. Pitch angle distribution

4.3.1. Pitch angle distribution at $I_p = 1.0$ MA

The first orbit model predictions in Figs 7 and 8 are just the expected pitch angle distributions corrected for the geometric resolution of the detector (Section 3). Thus, the pitch angle distributions of Fig. 7 for the exposures at a plasma current of 1.0 MA (C and E) show good agreement between the

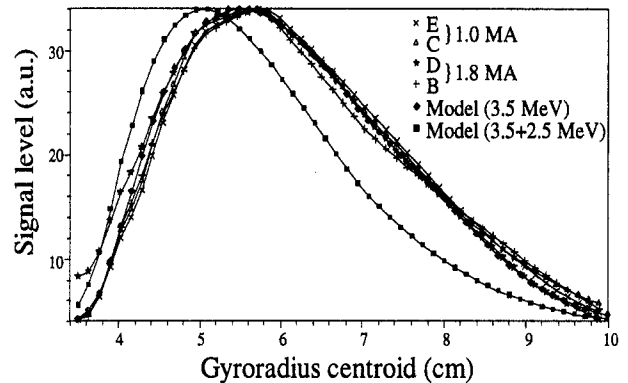


FIG. 12. Gyroradius distributions of alpha loss as measured with the 90° lost alpha scintillator detector averaged over toroidal pitch angle, from 45° to 90° , and time, from 3.4 to 3.7 s (i.e. the quasi-steady state portion of the discharge). Model curves are plotted for 3.5 MeV alphas and equal fluxes of 2.5 and 3.5 MeV alphas after being corrected for the finite aperture sizes and optical resolutions of the detectors. The curves are normalized vertically to each other near their peaks, but the horizontal axes were absolutely calibrated by an in-vessel alignment to within ~ 1 cm.

observations and the first orbit loss model. However, the wide pitch angle acceptance of the collimating ports ($\pm 45^\circ$ for the original design; $\pm 27^\circ$ for the redesign) result in relatively poor pitch angle resolution. To obtain improved information pertaining to the pitch angle distribution, it was decided to cut selected samples vertically in half to compare the fluences contained in the right and left halves. A loss at a pitch angle larger than the collimating port's orientation tends to concentrate helium in the left half of the foil stack, assuming $r \gg w, d$ and $\chi_0 > 0$ (definitions of symbols are given in Sections 2.1 and 3).

The PORT code was used to predict the fraction of alpha fluence implanted in the left half of the foil stack, referred to as the left collection fraction, for the pitch angle distribution generated for first orbit loss using the Lorentz ORBIT code. In other words, the left collection fraction L is

$$L = \frac{l}{l+r}$$

where l and r are the amounts of helium contained in the left and right halves, respectively. Figure 13 shows a comparison between the fraction of helium detected in the left half for the selected samples at 1.0 MA and the model prediction as a function of port orientation. The solid line represents the expected left collection fraction, assuming the cut was made right down the

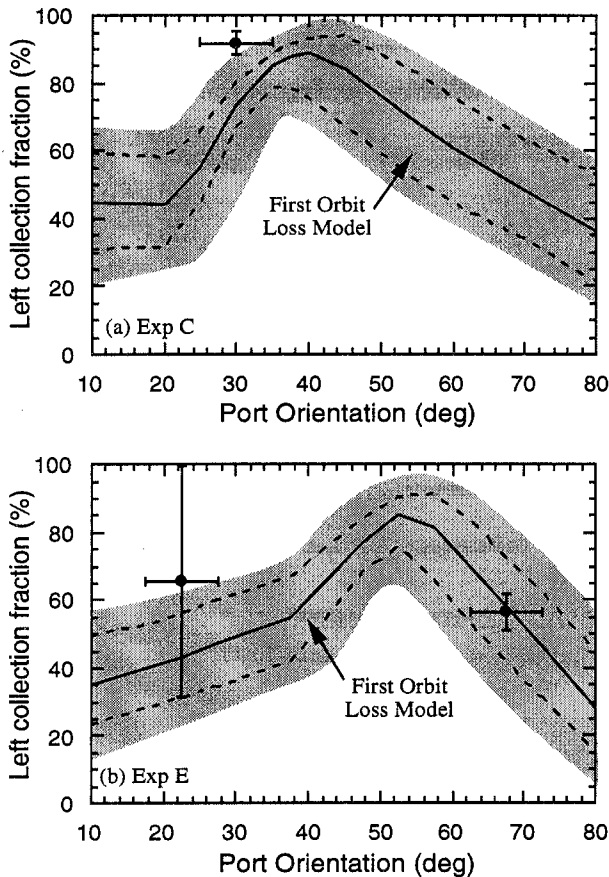


FIG. 13. Left collection fraction at $I_p = 1.0$ MA as a function of port orientation for the upper row of (a) the 30° port of exposure C and of (b) the 22.5° and 67.5° ports of exposure E. The left collection fraction is the fraction of helium in layers 4 through 9 that implanted in the left half of the stack. The model is based on the first orbit loss pitch angle distributions calculated using ORBIT. The dashed lines represent the model assuming the cut is made 10% of the port width to the right (upper dashed line) or to the left (lower dashed line) of centre.

middle of the foils. The dashed lines represent the expected left collection fractions for the cases where the cut is made just 10% to the left or right of centre of the port diameter (i.e. ~ 0.6 mm). The model appears to slightly underestimate the left collection fraction at the 30° port. A possible explanation for this will be discussed in Section 4.5. Otherwise, there is reasonable agreement between the first orbit loss model and the data.

4.3.2. Pitch angle distribution at $I_p = 1.8$ MA

Figure 14(a) (analogous to Fig. 13) shows a comparison between the fraction of helium detected in the left half of the foil stacks for the 22.5° and

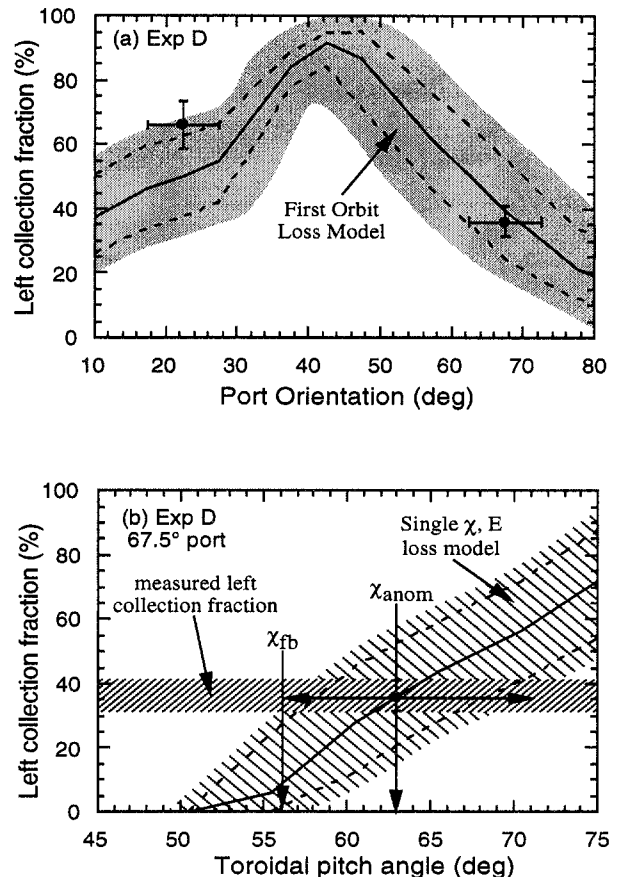


FIG. 14. (a) Left collection fraction at $I_p = 1.8$ MA as a function of port orientation for the upper row of the 22.5° and 67.5° ports of exposure D, analogous to Fig. 13. (b) Left collection fraction at $I_p = 1.8$ MA for the upper 67.5° port of exposure D fitted to a model based on alpha loss at a single energy (2.5 MeV) and a single toroidal pitch angle as a function of this pitch angle. From the data, a toroidal pitch angle for the anomalous loss of $63 \pm 7^\circ$ is inferred.

67.5° ports of exposure D and the model prediction as a function of port orientation. The model again appears to underestimate the left collection fraction at the 22.5° port. The observation at 67.5° is in good agreement with the model for 3.5 MeV alphas lost with the pitch angle distribution calculated using the Lorentz ORBIT code. However, the majority of the loss detected by this port is the partially thermalized anomalous loss.

The PORT code can be used to find the toroidal pitch angle for the anomalous loss that produces the best match to the observed left collection fraction. This assumes that the anomalous loss can be represented by a loss at a single pitch angle and single energy of 2.5 MeV. Figure 14(b) shows that the

measured left collection fraction, at $\sim 36 \pm 5\%$, best matches the model for 2.5 MeV alphas at a toroidal pitch angle of $\sim 63 \pm 7^\circ$. The toroidal pitch angle of the fattest banana orbit χ_{fb} , which corresponds to the boundary between passing and trapped particles, was seen in Fig. 1 to occur at $\chi_{fb} \approx 56^\circ$ for $I_p = 1.8$ MA. Thus, it is concluded that $\chi_{anom} > \chi_{fb}$ under the preceding assumptions.

The extent of the anomalous loss in pitch angle can be further narrowed down by its absence in some of the detector samples. The pitch angle distributions of Fig. 8 for the exposures at a plasma current of 1.8 MA (B and D) show that there is no anomalous loss being detected by the 120° (112.5°) port of exposure B (D), indicating that the anomalous loss does not extend to pitch angles as large as first orbit loss, as previously mentioned in Section 4.1.2. The $\pm 45^\circ$ pitch angle acceptance of the probe head used in exposure B means that the 120° port should be able to detect alphas with pitch angles all the way down to 75° . However, the self-shadowing effect of the probe head results in an effective minimum toroidal pitch angle cut-off at $\chi_t > 87^\circ$ [4, 5]. The use of the redesigned probe with its smaller pitch angle acceptance range in exposure D is slightly more restrictive. This sets the upper limit on the toroidal pitch angle of the anomalous loss at 87° .

Similarly, the toroidal pitch angle acceptance for the 30° (22.5°) port extends up to $\chi_t = 75^\circ$ (49.1°) for exposure B (D). Probe shadowing is not a factor in these ports since pitch angles near 90° are excluded. It was seen in Section 4.2.2 that the partially thermalized anomalous loss was detected in the 30° port of exposure B, but not in the 22.5° port of exposure D (although the anomalously large alpha fluence in this port is not fully understood). Thus, the anomalous loss occurs at toroidal pitch angles $\chi_t < 75^\circ$, but not at $\chi_t < 49^\circ$. This sets the lower limit on the toroidal pitch angle of the anomalous loss, χ_{anom} , at 49° . Combining these results yields, $49^\circ \leq \chi_{anom} \leq 87^\circ$. It might, however, be expected that a feasible anomalous loss mechanism would preferentially provide either trapped or passing particles. Since the best fit in Fig. 14(b) gave $\chi_{anom} > \chi_{fb}$, trapped particles are probably the main constituent of the anomalous loss. It thus seems likely that the anomalous loss pitch angle distribution is concentrated in a narrow range above the passing-trapped boundary (i.e. $56^\circ < \chi_{anom} < 87^\circ$).

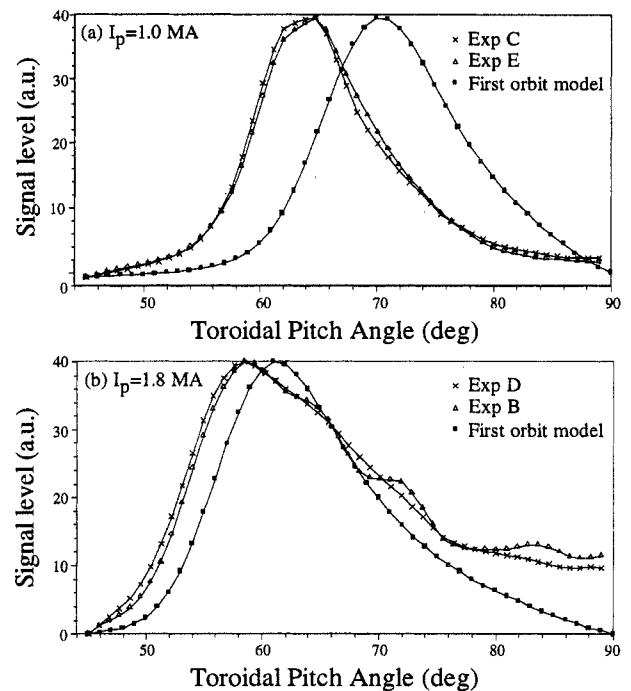


FIG. 15. Toroidal pitch angle distributions of alpha loss as measured with the 90° lost alpha scintillator detector averaged over gyroradius, from 3.5 to 9.9 cm, and over time, from 3.4 to 3.7 s. Model curves are plotted for the ORBIT calculated first orbit loss after being corrected for the finite aperture sizes and optical resolutions of the detectors. The curves are normalized vertically to each other near their peaks, but the horizontal axes were absolutely calibrated by an in-vessel alignment to within $\sim 3^\circ$.

4.3.3. Comparison with lost alpha detector

The toroidal pitch angle distributions measured with the 90° lost alpha scintillator detector are shown in Fig. 15. For comparison, the Lorentz ORBIT generated pitch angle distributions are plotted after being corrected for the geometric and optical resolutions of the detectors. The model at $I_p = 1.0$ MA in Fig. 15(a) tends to overestimate the toroidal pitch angle of first orbit loss (i.e. the model is shifted to the right of the measured distribution) by $\sim 6^\circ$. This discrepancy will be referred to in Section 4.5. The peaks of the $I_p = 1.8$ MA distributions in Fig. 15(b), however, agree to within the 3° uncertainty associated with the scintillator detectors. The shapes of the model distributions are in reasonable agreement with the measured ones. The distribution at 1.8 MA appears to be somewhat wider than predicted, but there is no indication of an anomalously large loss occurring at a pitch angle above the fattest banana orbit.

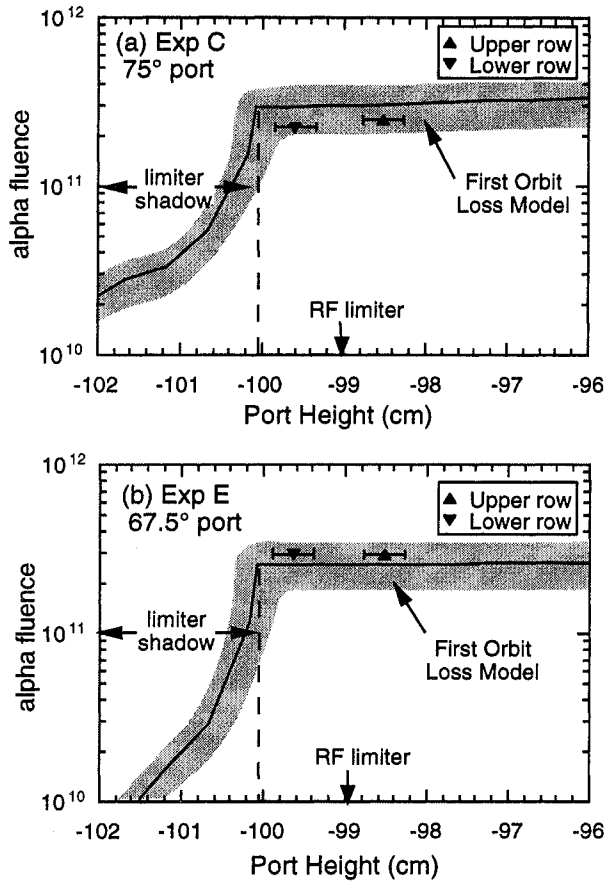


FIG. 16. Alpha fluence at $I_p = 1.0$ MA for layers 4 through 9 as a function of port height for the upper and lower rows of (a) the 75° port of exposure C and (b) the 67.5° port of exposure E. The RF limiter shadow begins ~ 4 mm below the midplane of the lower row.

4.4. Radial distribution

4.4.1. Radial distribution at $I_p = 1.0$ MA

It is apparent from Fig. 7 that the fluences of alphas at a plasma current of 1.0 MA to the upper and lower rows of the outboard ports are comparable. Figure 16 shows the fluence levels for the 1.0 MA exposures (C and E) measured in layers 4 to 9 (representing first orbit loss) of the 75° upper and lower ports and compares them with the first orbit loss model as a function of detector height as measured from the midplane. The modelled fluence drops sharply about 1.0 cm outside the RF limiter radius owing to the shadowing effect of the limiter. Although the lower row of ports was placed below the RF limiter, the outward bulge of the magnetic field (by ~ 1.5 mm [18]) between TF coils associated with TF ripple and the downward drifts (∇B and curvature) that an alpha experiences during its transit from the

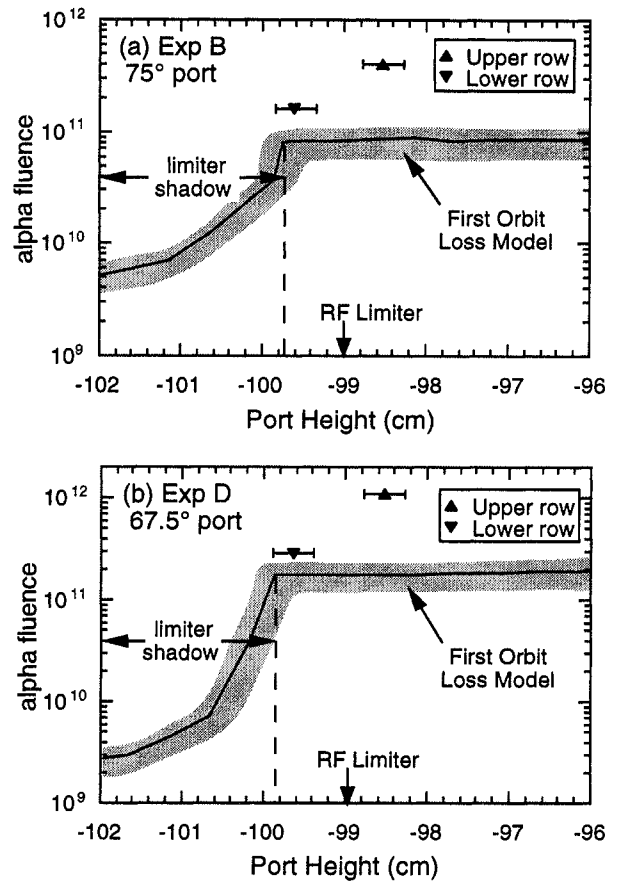


FIG. 17. Alpha fluence at $I_p = 1.8$ MA for layers 4 through 9 as a function of port height for the upper and lower rows of (a) the 75° port of exposure B and (b) the 67.5° port of exposure D. The RF limiter shadow begins only ~ 2 mm below the midplane of the lower row, possibly placing the lower row partially in the shadow. The decrease in the anomalous loss from the upper to the lower row may be attributable to shadowing and/or a radial diffusive loss.

limiter to the probe is sufficient to keep the lower ports out of the limiter shadow.

4.4.2. Radial distribution at $I_p = 1.8$ MA

Figure 8 showed that the fluences of alphas at a plasma current of 1.8 MA for the 30° and 75° ports drop by a factor of 3 or more between the upper and the lower rows. Figure 17 (analogous to Fig. 16) shows the fluence levels for the 1.8 MA exposures (B and D) of the 75° upper and lower ports and compares them with the first orbit loss model as a function of detector height. A strong radial dependence is clearly present among the 1.8 MA anomalous loss data. It is unclear whether this radial dependence is due to the RF limiter shadowing or a radial diffusive loss of alphas. The shadowing effect of the limiter increases

when the alpha orbits stay closer to the magnetic field lines, as occurs with decreased alpha energy, decreased alpha pitch angle or increased plasma current. Lorentz ORBIT code simulations show that for a 2.5 MeV alpha, the limiter shadow is brought only ~ 1 mm closer to the RF limiter radius than is shown in Fig. 17 for first orbit loss, making it unlikely that the strong radial dependence is due solely to limiter shadowing. A diffusive loss having a finite random radial step size between toroidal transits could give rise to a radial dependence near absorbing boundaries, such as the RF limiter and the probe head itself (see Section 5.3). Further experiments that vary the radial position of the probe would be necessary to obtain a conclusive result. However, the strong radial dependence is further evidence that the 1.8 MA loss is not pure first orbit loss.

4.4.3. Comparison with lost alpha detector

The 90° scintillator detector with which the alpha collector results are compared is fixed in position such that a radial scan is not possible. As pointed out in Section 2.1.2, the pinhole aperture of the scintillator detector is located ~ 0.9 cm lower than the top of the lower row of the alpha collector. Therefore, the strong radial dependence of the anomalous loss might explain why it is not observed on the 90° scintillator.

The scintillator detector located 20° below the outer midplane is, however, movable. Radial scans have been accomplished using this probe to investigate the diffusive nature of stochastic ripple diffusion (SRD) of fusion products. SRD causes alphas to be lost near their birth energy and can be the dominant loss mechanism in a narrow poloidal region about the outer midplane. These scans have shown a radial dependence of alpha loss comparable to that of the 1.8 MA anomalous loss observed using the alpha collector (i.e. \sim a factor of 3 decrease for ~ 1 cm radial outward movement near the RF limiter edge). There have not, however, been any indications of a partially thermalized loss to the 20° scintillator detector.

4.5. Uncertainties

The minimum experimental uncertainty in the alpha fluence measurement is estimated to be equal to the minimum detectable fluence of $\sim \pm 5 \times 10^8$ alphas per sample [12]. For Figs 7, 8, 16 and 17, where the fluences of layers 4 through 9 (six layers) are summed, the minimum uncertainty is $\sim 1.2 \times 10^9$ ($\approx \sqrt{6} \times 5 \times 10^8$). For summed fluences $\geq 1.2 \times 10^{10}$ alphas, the experimental uncertainty is estimated to be $< \pm 10\%$

[12], corresponding approximately to the height of a data point (i.e. triangle symbol) on this semilogarithmic scale.

The 5° uncertainty in the port orientation assigned to the data points in Figs 7, 8, 13 and 14(a) corresponds to ~ 2 mm on the circumference of the probe. This is the maximum misalignment that might be expected from the method used to align the probe head onto its base, combined with the uncertainty in the base alignment with respect to the vessel.

The error in the first orbit loss model represented by the shaded regions in Figs 7, 8, 16 and 17 is based on several uncertainties. First of all, the source and current profiles used by the Lorentz ORBIT code are taken from TRANSP for one time during the flat-top portion in the discharge. These profiles are used to represent the plasma for the entire duration of the shot. Performing the calculation for other times throughout the discharge results in less than 15% variation in the total fluence calculation. Thus, the choice of a single time near the time of maximum fusion rate should introduce no more than 15% error. Another error in the first orbit loss model comes from converting the alpha collection fraction in alphas per neutron to total loss fluence by multiplying by the global neutron production. The global neutron measurements have an $\sim 5\%$ error associated with them which is transferred to the alpha fluence calculation. Combining these uncertainties, along with other sources of uncertainty, such as the accuracy of the TRANSP profiles, the overall minimum error in the first orbit loss model is estimated to be $\pm 30\%$. This uncertainty is based on the modelling of the 75° port. The 22.5° port can have substantially more error since the main contribution of alphas to this port is from co-going alphas born near the edge of the plasma (e.g. the 40° orbit of Fig. 1), and is thus extremely sensitive to uncertainties in the source profile which can greatly affect the source term at the edge. The 75° port fluences are dominated by alphas lost near the fattest banana orbit that pass closest to the magnetic axis where the source profile is peaked and are thus not as sensitive to the shape of the profile. The uncertainty due to the source profile was estimated using the results of a sensitivity analysis in which a parabolic power source profile was assumed: $S(r) = S_0[1 - (r/a)^2]^{i_s}$, where $S(r)$ is the source profile as a function of minor radius r , S_0 is the alpha source term at the magnetic axis, a is the edge minor radius and i_s is the source term peaking exponent. The Lorentz ORBIT calculated alpha collection fraction was evaluated for $i_s = 8 \pm 1$, a common value for

the peaking exponent with a reasonable uncertainty. Where the alpha collection fraction varied by more than $\pm 30\%$, the higher uncertainty due to source profile sensitivity was used.

The first orbit model also incorporates a $\pm 5^\circ$ uncertainty in the port orientation which comes about because of uncertainties in the plasma current profile and modelling inaccuracies of the vacuum magnetic field in the Lorentz ORBIT code. As illustrated in Fig. 15, the first orbit model does not match the pitch angle distribution measured by the scintillator in the 1.0 MA case. Correcting this overestimate would roughly correspond to a shift of the model distributions to the left by $\sim 5^\circ$. The agreement between the data and the model for the 1.0 MA distributions, shown in Figs 7 and 13, would be improved by such a shift. To account for this uncertainty, the first orbit model is given a $\pm 5^\circ$ spread.

The uncertainty in the left collection fraction data of Figs 13 and 14 is based on comparing the maximum and minimum possible measured alpha fluences, based on the measurement uncertainty of the larger of $\pm 1.2 \times 10^9$ alphas or $\pm 10\%$, for the left and right halves.

5. DISCUSSION

5.1. Summary of experimental results

Measurements of escaping alphas were made using the alpha collector probe for plasma currents of 1.0 and 1.8 MA. The helium released from foil layers 4 through 9, which should be representative of first orbit lost alphas, was then compared with a first orbit loss model with respect to the total alpha fluence implanted into these foils, and the energy, pitch angle and radial distributions inferred from the measured loss. The comparison at 1.0 MA indicates that the measurement from layers 4 through 9 is consistent with the first orbit loss model for 3.5 MeV alphas. The shallow layers (2 and 3), however, suggest that a small ($\sim 1/3$ the fluence of first orbit loss), low energy (< 2.0 MeV) anomalous loss feature may be occurring at this plasma current.

The comparison at 1.8 MA reveals a partially thermalized loss with a total alpha fluence nearly an order of magnitude ($\approx 7\times$) larger than that of the first orbit loss model and a wide energy distribution peaked at $\sim 2.5 \pm 0.3$ MeV (i.e. $\sim 30\%$ below the birth energy of 3.5 MeV). The pitch angle distribution of the inferred anomalous loss appears to occur in a

narrow region above the passing-trapped boundary ($\chi_{fb} \approx 56^\circ$) and is peaked at a toroidal pitch angle of $\sim 63^\circ \pm 7^\circ$. This anomalous loss drops by approximately a factor of 3 in magnitude from the upper row to the lower row of the collimating ports (separated by ~ 1.1 cm), in contrast to the first orbit loss model which remains nearly constant between the two rows. There is no evidence of this anomalous loss on the 90° lost alpha scintillator detector.

5.2. Comparison of 1.8 MA anomalous loss with delayed loss

The anomalous results obtained with the alpha collector probe are qualitatively similar to an anomalous loss feature called 'delayed loss', which is not yet understood [19]. Delayed loss is observed with the lost alpha scintillator detectors for DD fusion products (i.e. 3 MeV protons and 1 MeV tritons) in DD plasmas. Delayed loss, however, has not been observed with the scintillator detectors for DT alphas [1]. The following is a list of the observed characteristics of delayed loss and how they compare with the anomalous loss observed with the alpha collector probe.

(a) Delayed loss is seen at the scintillator detector located 90° poloidally below the outer midplane (i.e. at the bottom of the TFTR vessel), but not at the 20° , 45° or 60° detectors. This is consistent with the current results in that the measurements made with the alpha collector probe were only made at the bottom of the vessel.

(b) The delayed loss to the 90° scintillator detector has a strong dependence on the plasma major radius, being largest at the small major radius of $R = 2.45$ m, and disappearing for $R > 2.55$ m. Again, this is consistent with the current results in that the measurements made with the alpha collector probe were made in $R = 2.45$ m plasmas. The alpha collector was used only in these small plasmas to minimize probe heating by maximizing its distance from the plasma. The design does allow its use in up to $R = 2.52$ m plasmas, but no exposures were made at this radius.

(c) The strength of delayed loss increases with respect to the first orbit loss with increased plasma current, becoming dominant above 1.8 MA. This is consistent with the result that only first orbit loss (with the exception of a small anomalous loss feature at low energy) was observed at 1.0 MA, but a large anomalous loss, in addition to first orbit loss, was observed at 1.8 MA using the alpha collector probe. The total loss (first orbit plus delayed loss) in DD at

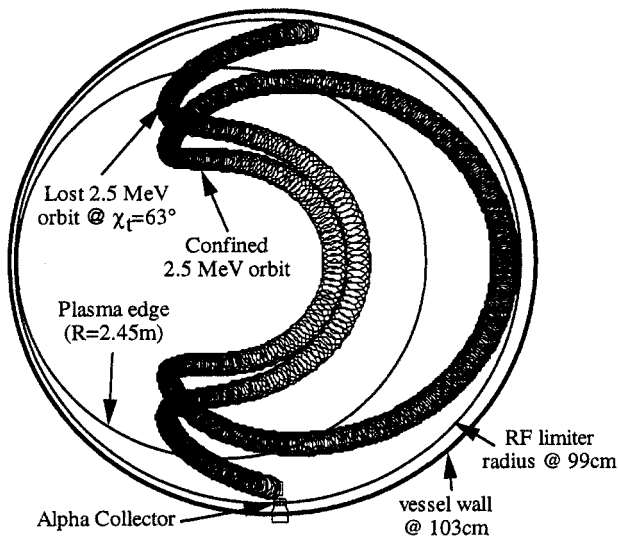


FIG. 18. Trajectories in a $R = 2.45$ m, $I_p = 1.8$ MA plasma of an anomalous loss orbit (2.5 MeV, $\chi_t = 63^\circ$) that strikes the detector at the bottom of the TFTR vessel and a marginally confined orbit with the same parameters that just misses the RF limiter at the outer midplane. The banana tips of the two orbits are displaced by ~ 17 cm.

1.8 MA as measured with the 90° scintillator detector was about a factor of 2 above the expected first orbit loss [19], as compared with a factor of 7 for the alpha collector in DT at 1.8 MA.

(d) The energy of delayed loss particles is about half (i.e. $55 \pm 15\%$ [19]) that of the prompt first orbit loss, as inferred from the gyroradius of its scintillator impact. This is consistent, within the energy resolution of the detectors, with the $\sim 70 \pm 10\%$ of birth energy inferred for the anomalous loss of the alpha collector.

(e) Delayed loss at $I_p = 1.8$ MA occurs at a pitch angle approximately 10° above that of the fattest banana orbit. This is roughly consistent with the anomalous loss pitch angle inferred to be $\sim 7 \pm 7^\circ$ above the fattest banana pitch angle of 56° .

(f) Delayed loss is delayed by $\sim 200 \pm 100$ ms with respect to the usual first orbit loss, as can be seen most clearly at the beginning and end of NBI. The time resolution of the alpha collector is limited to a single discharge since it integrates alphas over an entire shot. Thus, this feature of delayed loss cannot be checked with the alpha collector. However, the inferred energy of $\sim 70 \pm 10\%$ of the birth energy for the anomalous loss requires a delay of ~ 100 ms for the alphas to slow down to this energy (assuming an energy e-folding time of ~ 200 ms) consistent with delayed loss.

(g) Delayed loss increases slowly with NBI power at a fixed plasma current. The alpha collector exposures were all done at an NBI power of ~ 10 MW. Thus, a comparison of the NBI power dependence of the two anomalous losses cannot be made. The design of the collector probe does allow its use in full power discharges, making a beam power scan possible, but such a scan was not done.

(h) For $R = 2.45$ m and $I_p = 1.8$ MA plasmas, delayed loss to the 90° scintillator detector is of the same order of magnitude as first orbit loss in DD plasmas, but is absent in DT plasmas. The anomalous loss to the alpha collector appears to be about a factor of 6 times larger than first orbit loss in DT plasmas. The alpha collector is not capable of detecting DD fusion products. The lack of detectable levels of delayed loss on the scintillator detector in DT plasmas but apparently large levels in the alpha collector is most likely due to the different radial positions of the two probes. The lower row of the alpha collector extends nearly 1 cm further into the vessel than does the pinhole aperture of the 90° scintillator detector. The strong radial dependence of the anomalous loss, seen in the upper/lower row comparisons of Fig. 17, may be sufficient to make it an insignificant contribution to the loss observed by the scintillator detector. Their different toroidal positions relative to toroidal asymmetries in the vessel such as limiters and the path of neutral heating beams may also be a factor.

It may be significant to note that the delayed loss features changed significantly when the 90° scintillator detector was repositioned after the 1990 run to accommodate the installation of a new poloidal RF limiter [19]. Previously, the detector aperture was located about 4 cm radially outside (i.e. below) and about 120° toroidally from the edge of the nearest limiter. The new limiter was installed only 45° toroidally from this detector, which forced a relocation of its aperture to only about 1 cm below the edge of this new limiter to avoid shadowing of the aperture [20]. After the repositioning, the delayed loss feature increased in magnitude (by a factor of ~ 4 at $I_p = 1.8$ MA) and peaked at a pitch angle closer to the passing-trapped boundary. The implication was that, after its repositioning, the 90° detector collected more anomalous delayed loss at low pitch angles than it had previously, presumably because these ions had not reached the aperture of the detector in the 1990 run. The first orbit loss features remained essentially unchanged between the two runs. This demonstrates the fact that delayed loss is extremely sensitive to

the relative positioning of a detector at 90° and the obstacles that fusion products may encounter, such as RF limiters.

The similarities between delayed loss and the anomalous loss observed with the alpha collector imply that they may be due to the same loss mechanism. In Section 5.4 some of the possible loss mechanisms are considered.

5.3. Trajectories of anomalous loss orbits

The trajectory of an alpha particle's last orbit prior to intersection with the detector can be calculated using the Lorentz ORBIT code. Figure 18 shows the last orbit traced backwards in time from the alpha collector at the bottom of the vessel to an RF limiter at the top of the vessel for an alpha particle at $E = 2.5$ MeV and $\chi_t = 63^\circ$ (the parameters inferred for the anomalous loss) for the $R = 2.45$ m, $I_p = 1.8$ MA discharge of exposure B. Also shown in Fig. 18 is a marginally confined orbit of the same energy that was started with an upward vertical displacement of the lower banana tip of ~ 17 cm with respect to the last orbit. The outer leg of this confined orbit just barely misses the projection of the RF limiter (centred at $R = 2.61$ m with a minor radius of 0.99 m) near the outer midplane. Thus, confined orbits with banana tips just below this one intersect the wall just below the outer midplane. Therefore, the anomalous loss orbits detected at 90° could be brought there by a relatively large vertical step on the last bounce of a previously confined trapped orbit, while smaller vertical steps would cause the loss to occur nearer the outer midplane, as in stochastic ripple diffusion [21].

A detailed study of many anomalous loss orbits such as those in Fig. 18 has shown that the vertical displacement of the lower banana tip required for a previously confined orbit to reach the alpha collector at the bottom of the vessel (for $E = 2.2$ to 2.8 MeV alpha orbits within $\chi_t = 56-70^\circ$) is at least 15 cm. Such a large step size, however, is inconsistent with the observed radial dependence of the anomalous loss. The 1.1 cm separation between the upper and lower rows of ports is much less than the required step size of > 15 cm. Thus, there should be little variation in the alpha fluence between the rows, but measurements show a factor of 3 difference between the upper and the lower row.

Small step size radial diffusion could explain the observed radial dependence, except for the fact that the corresponding high energy alpha orbits cannot reach the bottom of the vessel, having been scraped

off at the midplane. As can be inferred from Fig. 18, the probe would have to be placed ~ 20 cm further into the vessel to intercept a marginally confined alpha orbit with the anomalous loss parameters. A smaller banana width could allow an alpha orbit to strike the bottom of the vessel first, but this would require an alpha energy of ~ 0.3 MeV, less than the minimum detectable energy of the alpha collector. But if, for the sake of argument, one assumes that there are orbits that strike the bottom of the vessel first as they diffuse radially outwards, then the radial dependence of the anomalous loss can be used to calculate a diffusive step size. Assuming that at every bounce the particles walk randomly with a step size of b , and that they will be scraped off by an obstacle (such as the RF limiters or the probe head) with a probability P_l , the alpha flux at a distance x behind the obstacle is $I(x) = I_0(1 - P_l)^N$, where I_0 is the alpha flux at $x = 0$, and $N = (x/b)^2$ is the number of bounces needed for the particle to randomly walk the distance x [22]. The probability of scrape-off is estimated to be the ratio of the toroidal extent of the obstacles above x to the toroidal circumference of the vessel. It can easily be shown that the scrape-off on the probe head is insignificant compared with the scrape off on the RF limiters. For the lower row of ports, with $x = 0.6$ cm and $P_l \approx 0.13$ (eight limiters that each have a toroidal extent above x of ~ 27 cm), the factor of 3 between rows results in a step size of ~ 0.2 cm. Diffusion at this step size down to the location of the scintillator detector, with $x = 1.2$ cm and $P_l \approx 0.19$ (toroidal extent of each limiter above x increased to ~ 39 cm), occurs with a flux reduction by a factor of ~ 2000 with respect to the upper row of ports, consistent with the absence of anomalous loss to the 90° scintillator detector.

A step size of 0.2 cm per bounce corresponds to a diffusion coefficient, $D = b^2/\tau_b$, of ~ 0.4 m²/s, where the bounce period $\tau_b \approx 10$ μ s. This results in a time-scale for diffusion to the wall, $\tau_D \approx a^2/4D$, of ~ 0.6 s. Assuming all the alphas diffuse at this rate, $\sim 30\%$ of the alphas should be lost to the wall within one energy e-folding time. However, small step size diffusion to the bottom of the TFTR vessel probably is not realistic, since it is not consistent with high energy orbits that tend to scrape off near the midplane. A larger step size would result in a larger global loss; however, there would probably be a threshold condition such that not all of the alphas are included in the diffusive process. Thus, without knowing the loss mechanism, it is difficult to estimate the global loss associated with the observed anomalous loss.

Table II. Explanations of Anomalous Loss

Possible explanations	Anomalous loss features					
	(a) 90° scintillator	(b) I_p dependence	(c) Total fluence	(d) Energy distribution	(e) Pitch distribution	(f) Radial distribution
(1) Collisional loss	X ^a	? ^b	X	O ^c	X	?
(2) TF ripple	?	?	X	X	O	?
(3) MHD effects	?	?	X	?	?	?
(4) CX loss	X	O	O	O	O	X
(5) I_p rampdown	X	O	O	X	?	?
(6) Scattering	?	X	X	O	?	O
(7) Activation	O	X	X	?	X	?
(8) Foil surface fusion	X	X	X	O	?	O
(9) Diffusion of residual He	O	X	?	X	?	O
(10) Diffusion of implanted He	O	X	X	X	?	O

^a X, inconsistent.

^b ?, undecided.

^c O, consistent.

The large step size of 17 cm inferred from the orbits of Fig. 18 is consistent with the 15 cm that was estimated in the same manner in Ref. [19] for delayed loss of 1.5 MeV (half the birth energy) DD fusion protons to the 90° scintillator detector for an $R = 2.45$ m, $I_p = 2.0$ MA discharge. Thus, the arguments as to the unlikelihood of pitch angle scattering, TF ripple and MHD as possible causes of delayed loss [19] also apply to the 1.8 MA anomalous loss observed with the alpha collector probe, and will thus only be briefly summarized in the next section. Several new possibilities that attempt to explain the anomalous loss are also considered in the next section.

5.4. Possible anomalous loss mechanisms

A model attempting to explain the mechanism responsible for the anomalous loss observed with the alpha collector would have to be consistent with the following features:

- Absence of anomalous loss on the 90° lost alpha scintillator detector in DT;
- I_p dependence — occurs at 1.8 MA but not at 1.0 MA;
- Total fluence — ≈ 6 times larger than first orbit loss;
- Energy distribution — peak at $\sim 2.5 \pm 0.3$ MeV inferred from shallow range distribution;
- Pitch angle distribution — peak at $\sim 7 \pm 7^\circ$ above the passing-trapped boundary and most probably concentrated in a narrow region above this boundary;

- Radial dependence — factor of 3 decrease from upper to lower row (separated by 1.1 cm).

The anomalous loss mechanisms described in the following sections are summarized in Table II with respect to their consistency with the observed loss features listed above.

5.4.1. Collisional loss

The time delay of ~ 0.2 s observed on the 90° scintillator detector for delayed loss suggests a classical collisional loss mechanism, since this time is of the order of the slowing down time for fusion products [23]. Although large pitch angle scattering is capable of causing a confined orbit to become lost, it is too infrequent to be of significance, occurring on a time-scale of ~ 10 s [24].

Small pitch angle scattering of barely passing alphas into the first orbit loss cone can generate a diffusion of alphas across the passing-trapped boundary [24]. The alphas that are subsequently lost should be marginally trapped, i.e. they should appear at the detector at the pitch angle of the passing-trapped boundary ($\sim 56^\circ$ at 1.8 MA). However, delayed loss is seen to occur at pitch angles clearly above the passing-trapped boundary. This also appears to be the case with the alpha collector anomalous loss at 1.8 MA (Section 4.3.2). Furthermore, models consistently predict small loss fractions for collisional loss relative to first orbit loss. For instance, Ref. [23] reported a TRANSP prediction for an $R = 2.45$ m, $I_p = 1.6$ MA TFTR discharge of a global loss due

to collisions of alphas of only 0.35%, which was only $\sim 5\%$ of the calculated first orbit loss fraction for that shot.

5.4.2. Toroidal field (TF) ripple effects

There are at least two different mechanisms through which TF ripple can cause radial transport of fast ions. Stochastic ripple diffusion [25] is a collisionless process which produces a radial step near the banana tip of those trapped particles that meet a particular threshold criterion. The maximum vertical step size for 2.5 MeV alphas in the conditions of discharge B can be shown to be ≈ 5 cm, in a manner similar to the calculation of Ref. [19] that estimated a ≈ 3.5 cm maximum step size for 1.5 MeV protons in a 2 MA plasma. Therefore, even if a trapped particle passes through two banana tips before passing near the midplane, it can only gain up to a maximum of 10 cm outward displacement, significantly less than the 17 cm necessary to reach the alpha collector at the bottom of the vessel (Section 5.3). This relatively small step size is such that almost all of the SRD loss should be localized within 30° of the outer midplane [21].

A synergistic enhancement of fast ion diffusion has been found for SRD with collisions [13]. This effect is simulated using the Hamiltonian guiding centre drift orbit Monte Carlo code, gc-ORBIT [26] (not to be confused with the Lorentz ORBIT code). Under the conditions of the 1.0 MA discharges, this code predicts a global alpha loss of $\sim 25\%$. Only $\sim 15\%$ of this global loss is 'delayed' (i.e. occurring below 3.5 MeV). For the conditions of the 1.8 MA discharges, this code predicts a global alpha loss of $\sim 4\%$, of which only $\sim 21\%$ is 'delayed'. Thus, the synergistic enhancement is not of sufficient magnitude to make the 'delayed' losses at 1.8 MA much more significant than they are at 1.0 MA. Furthermore, these 'delayed' losses are clearly peaked poloidally within 30° below the outer midplane. It should be noted, however, that preliminary work by a group at the Kiev Institute for Nuclear Research has indicated the possibility of half-energy alphas reaching the 90° detectors through this mechanism [27].

The other TF ripple effect that can cause radial transport of fast ions is superbanana trapping inside the ripple wells [19]. Particles lost through ripple well trapping would have pitch angles very close to 90° , causing most of them to be self-shadowed by the probe head. The detection of the partially thermalized anomalous loss in the foil stack in the 30°


collimating port of exposure B (Fig. 8(b)) indicates that the anomalous loss extends down to toroidal pitch angles below 75° (Section 4.3.2). Furthermore, the left collection fraction analysis of Section 4.3.2 gives an estimate of $63 \pm 7^\circ$ for the toroidal pitch angle of the anomalous loss, slightly smaller than the value of $\sim 70^\circ$ measured by the 90° scintillator detector for delayed loss. Reference [19] concluded that it was unclear how particles lost through this mechanism could arrive at the detector with pitch angles this small. Most importantly, a loss of ripple well trapped particles at a true pitch angle of $\sim 90^\circ$ would have a better likelihood of implanting into the foils in the 120° port than in the 75° port because the 75° port has a larger self-shadowing effect. However, the anomalous loss is not detected in the 120° foils. Thus, it seems unlikely that ripple well trapping could provide an explanation of the anomalous loss.

5.4.3. MHD effects

The two mechanisms by which magnetic perturbations due to MHD activity can cause radial transport of high energy particles are considered with respect to delayed loss in Ref. [19]. These mechanisms are the parallel drift of the ion along radially perturbed field lines, and the perpendicular drifts across the field lines. Both the former mechanism and a non-resonant interaction of the latter required an unrealistically large magnetic perturbation of $\tilde{B}_r/B_t \approx 10^{-2}$ to achieve a 10 cm step size [19], where \tilde{B}_r is the local radial magnetic perturbation. The magnitude of normal magnetic perturbations inside plasmas is generally $\tilde{B}_r/B_t \approx 10^{-4}$ [28, 29]. Similarly, orbits resonant with the perturbation required the largest MHD perturbations in TFTR [19]. Thus, it was concluded that the effects of some hidden MHD activity during seemingly MHD quiescent plasmas cannot easily explain the large last step necessary to bring the escaping orbit to the 90° detector [19]. This conclusion applies equally well to the MHD quiescent discharges conducted for the alpha collector exposures as it did to discharges examined for delayed loss.

5.4.4. Loss of He^+ from charge exchange with impurities or NBI neutrals

Another possibility is that fully stripped alphas charge exchange with partially stripped impurities, producing singly ionized alphas through



where A^{q+} are plasma impurity ions. The singly ionized alpha particle then has twice the gyroradius it had before charge exchange, resulting in a doubling of its banana width. The orbits of previously confined alphas may suddenly make the transition to prompt loss trajectories that take some of the alpha particles to the detector.

Reference [30] concluded that for a 0.1% low charge state impurity concentration of oxygen (i.e. $\sim 1 \times 10^{11} \text{ cm}^{-3}$) in TFTR the average time for single electron capture for 2.0 MeV He^{2+} is ≈ 5 ms. This is much less than the ~ 200 ms alpha slowing down time and hence should cause a net diffusion to the container walls.

With the addition of carbon tiles, the main impurity in TFTR is now carbon, not oxygen. At $Z_{\text{eff}} \approx 1.5$ the impurity concentration for carbon is $\approx 5\%$, with roughly the same radial profile as the electron density. At electron temperatures ~ 10 keV most of this carbon is fully stripped (C^{6+}) in the core. The PPPL MIST code solves for the density of ions in each charge state using atomic physics appropriate for these low density high temperature plasmas [31]. A hydrogen-like carbon (C^{5+}) concentration of $\sim 5 \times 10^9 \text{ cm}^{-3}$ ($\sim 0.01\% n_e$) in the core, which increases by a factor of ~ 30 at the cooler plasma edge, is predicted by MIST. The lower charge states of carbon are present in the core at concentrations reduced by a factor of 1000 or more in relation to C^{5+} . The charge exchange cross-section calculated for the $\text{He}^{2+} + \text{C}^{5+}$ collision system using the classical trajectory Monte Carlo method [32] is $\approx 3 \times 10^{-18} \text{ cm}^2$ for alphas at 2.5 MeV. This classical treatment may not be appropriate in the energy range being considered because of unphysical capture to deeply bound states that only exist classically, resulting in cross-sections that may be unrealistically large by up to a factor of about 5 at ~ 2.5 MeV. Work is progressing in this area to substantiate these values [33, 34]. This results in a collision period for charge exchange of 2.5 MeV alphas in the core of $\tau_{\text{CX}} \approx 150$ ms, which is of the same order as the alpha energy e-folding time, and a period of $\tau_{\text{CX}} \approx 5$ ms at the edge. Charge exchange can therefore be a significant factor in the evolution of alpha orbits as they slow down, assuming that these cross-sections are reasonable.

Figure 19 illustrates a possible orbit transition due to charge exchange in a 1.8 MA plasma (exposure B) that can cause previously confined alphas to strike the detector at the bottom of the vessel. It depicts a 2.5 MeV trapped alpha that picks up an electron through charge exchange as it crosses the outer mid-

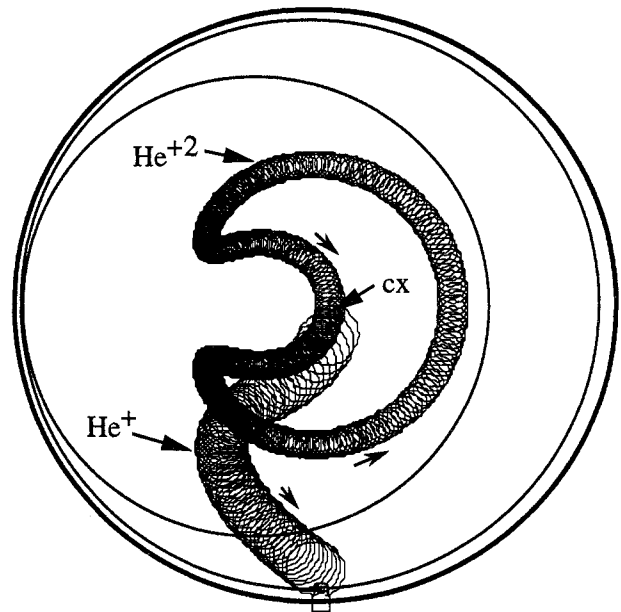


FIG. 19. Orbit transition for 2.5 MeV alphas that takes an alpha to the detector at 90° in an $R = 2.45$ m, $I_p = 1.8$ MA plasma for the alpha charge exchanging (CX) at the outer-midplane crossing point of the counter-going leg of a trapped particle ($R = 270$ cm, $\chi_t = 63.5^\circ$). Small arrows show the direction of guiding centre motion.

plane on its counter-going leg and is subsequently lost to the detector. Passing particles can also undergo charge exchange and be lost to the detector [4, 5].

Figure 19 represents an extreme in the orbit transitions possible through charge exchange. Charge exchange at other locations along an orbit results in less radial transport. A series of successive charge exchanges and reionizations could result in a radial diffusive process. However, as discussed in Section 5.3, the large radial step size needed to bring the orbits to the detector is inconsistent with the factor of 3 reduction in fluence between the upper and the lower rows of ports. It is not obvious how charge exchange loss could account for the radial dependence and absence of anomalous loss on the lost alpha scintillator detectors in DT. The larger downward drifts associated with the larger gyroradius of the He^+ should make shadowing by the nearby RF limiters less effective, and hence allow the charge exchange lost particles to easily reach the lower row of collimating ports on the alpha collector and the scintillator detector. Thus, although modelling has shown that this loss mechanism may be consistent with the plasma current dependence, total fluence, energy distribution and pitch angle distribution [4, 5], it does not appear to be consistent with the lack of

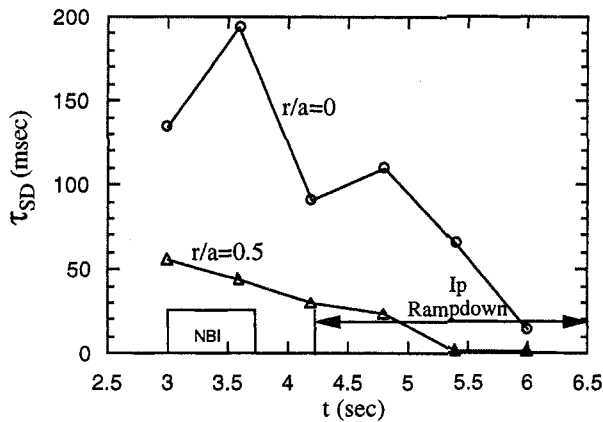


FIG. 20. Slowing down times calculated for $r/a = 0$ and $r/a = 0.5$ as a function of time in the discharge of exposure B.

anomalous loss to the 90° scintillator detector, nor with the radial dependence to the alpha collector (Table II).

The other potential donors of electrons present in significant quantities are the NBI neutrals [35]. In this case, the velocity of the donor (i.e. the neutral beam species) must be taken into consideration since it is an appreciable fraction of the alpha particle velocity. For instance, a 100 keV deuteron travels at about a third the speed of a 2.0 MeV alpha. The cross-section for charge exchange between a fully stripped 2.5 MeV alpha and a neutral 100 keV deuteron reaches a maximum of $\sim 10^{-18}$ cm² when they are travelling in the same direction, and a minimum of $\sim 10^{-21}$ cm² when they are travelling in opposite directions [36]. Using the maximum of 10^{-18} cm² to obtain a conservative estimate, and assuming a density of NBI neutrals of $\sim 10^9$ cm⁻³ and a beam volume to plasma volume ratio of ~ 0.01 to account for the beam localization results in a collision period of ~ 70 s. Thus, this process is insignificant in comparison to impurity charge exchange and slowing down.

The delayed loss observed by the scintillator detectors in DD might be caused by a similar mechanism. Since the DD fusion products are only singly ionized, charge exchange results in neutralization and subsequent straight line trajectories. Reionization in the plasma might allow some of these fusion products to make the transition to prompt loss orbits [35]. The differing mechanisms might account for the detection of the anomalous loss only in DD plasmas for the scintillator detectors.

5.4.5. Loss during I_p rampdown

As the plasma current is ramped down at the end of a plasma discharge, the remaining high energy alphas become deconfined as the downward ∇B and curvature drifts become dominant. However, the I_p rampdown in exposure B does not start until 500 ms after the end of NBI and since the energy e-folding time (τ_{sd}) due to electron drag remains < 200 ms, as shown in Fig. 20, in the plasma core during this time, the alpha energy should have dropped by several factors of e by the start of the I_p ramp. Just two e-folding times are sufficient to reduce the alpha energy to below the detector's minimum detectable energy of 0.5 MeV. The observed peak in the energy distribution occurs at an energy only $\sim 30\%$ lower than 3.5 MeV and so, assuming there are no accelerating forces acting on the alphas during the rampdown, it cannot be attributed to anything that occurs > 100 ms after the end of NBI. The induced toroidal electric field associated with the I_p rampdown can, however, cause a positive acceleration of counter-going passing alphas. But this toroidal acceleration causes them to become more passing, which is not consistent with the detection of co-going particles. Furthermore, if there is a significant lower energy loss occurring after NBI, it should be visible to the lost alpha scintillator detectors but it has never been observed. Therefore, a partially thermalized loss due to the current rampdown at the end of the discharge is not a viable explanation of the anomalous loss data.

It should be mentioned that the I_p rampdown in exposure D begins just 200 ms after the end of NBI which was extended by 300 ms to increase the total alpha fluence to the collector probe. In Section 4.2.2 the peak in the alpha energy distribution was inferred to be $\sim 2.7 \pm 0.3$ MeV. This is ~ 0.5 MeV higher than the peak of exposure B which had a 500 ms delay between the end of NBI and the beginning of the I_p rampdown. The higher anomalous loss energy associated with the shorter delay may be an indication that the anomalous loss mechanism does occur after the end of NBI, although, as mentioned above, this is highly unlikely. A scan of the delay time between NBI and the various ramp start times could resolve this issue.

5.4.6. Scattering off RF limiters and collimator walls

Scattering off RF limiters and the wall of a collimating port can reduce the energy spectrum of the

incoming alphas. However, it is unlikely that scattering could explain the anomalously large alpha fluence observed in the 1.8 MA plasmas, since this is not a source of new alphas. It is also unlikely that there will be a significant contribution of scattered alphas in the foil samples, since large angle deflections of alphas are quite rare in solids. TRIM-95 simulations (Section 3) of 3.5 MeV alphas implanting into carbon at shallow angles result in just 20% of the implanted alphas re-emerging from the face of a flat piece of carbon when implanted at an angle of incidence of 89° (1° grazing angle), and less than 1% at 85° . In other words, most of the alphas that enter a limiter or the wall of a collimating port will be stopped (within $\sim 11 \mu\text{m}$) without re-emerging. Bench top implants using aluminium collimators with ^{241}Am alpha sources were made for calibration purposes. Results showed reasonable agreement with the predicted fluence and range distribution [12]. Furthermore, it is unlikely that the plasma current dependence could be explained by scattering.

5.4.7. Activation of surrounding materials

Activation of materials in first wall components by absorption of 14 MeV fusion neutrons and the subsequent release of alphas through (n, α) reactions is very unlikely as a possible explanation of the anomalous loss. The largest cross-sections for (n, α) reactions from 14 MeV neutrons are of the order of 10^{-22} cm^2 [37]. Using this conservatively large cross-section results in a mean free path for a 14 MeV neutron of $\sim 0.1 \text{ cm}$ in solids. Assuming the resulting alphas can escape from within $10 \mu\text{m}$ of the surface, the neutron fluence of $\sim 10^{11} \text{ neutrons/cm}^2$ yields $\sim 10^9 \text{ alphas/cm}^2$, or about 3 orders of magnitude smaller than the levels detected by the alpha collector.

The fact that most of the (n, α) reactions have half-lives $> 10 \text{ s}$ [37] could allow the collector probe to integrate the alpha collection over an extended duration even after the shot is over, possibly explaining the absence of the anomalous loss on the real time scintillator detectors. However, it would be difficult to explain the pitch angle distribution and the plasma current dependence of the anomalous loss with such a mechanism.

5.4.8. Foil surface fusion

Another possibility that must be considered is that NBI deuterium and tritium ions at 100 keV may be

striking the surface of the foil and the walls of the collimating ports and fusing with deuterium and tritium that are on the surface. This would give rise to an alpha source with a nearly isotropic velocity distribution near the surface of the foils. These alphas would not have to undergo any collimation and so could implant at large incident angles (0° being normal to the surface), explaining the shallow depth distribution. However, the deeper collimating ports of the redesigned probe head were intended to exclude NBI ions while allowing alphas, which have $\sim 3\times$ larger gyroradius, to still implant [3]. It can be inferred from the fact that the anomalous loss features remained essentially unchanged between the two designs that foil surface fusion was not significant. This mechanism can also be ruled out on the basis of the current dependence. As I_p increases, the confinement of NBI ions should increase, providing less of a source of fusion on the foil surface.

5.4.9. Diffusion of residual helium

Residual helium in the tokamak, left over from previous experiments or from alpha ash, will not reach megaelectronvolt energies during a discharge with no RF. The first nickel foil layer should stop alphas below 0.5 MeV. If the foils are heated sufficiently to allow diffusion of this helium into the deeper foil layers, there should be a monotonic decrease in the alpha fluence with layer depth from a peak in the shallowest layer. Thus, diffusion of residual helium cannot account for the peaks in the fourth and fifth layers of the 1.8 MA exposures. Furthermore, it is unlikely that the current dependence of the anomalous loss could be explained by diffusion of residual helium since the improved confinement associated with the higher plasma current should reduce heating of collector foils. Diffusion of residual helium may, however, explain the low energy anomalous loss observed in 1.0 MA discharges.

5.4.10. Diffusion of implanted helium

The diffusion of implanted helium from layer to layer between the time of implantation and removing the foils from the spool piece cannot explain the anomalously large fluence associated with the 1.8 MA data. Furthermore, if implanted helium does diffuse, it should diffuse in both directions and not just towards the shallower layers as implied by the 1.8 MA data.

6. SUMMARY AND CONCLUSIONS

Escaping alpha particles from four DT shots have been collected in stacks of thin nickel foils located within the alpha collector probe on TFTR. The subsequent melting of the foils in a closed volume and measurement of the released helium as a function of layer depth yields a lost alpha energy distribution, with better than 20% energy resolution [3]. Two rows of eight collimating ports each provide full 360° pitch angle coverage (with the exception of self-shadowing of very deeply trapped particles by the probe head) with limited pitch angle resolution. The foil deposition technique employed by the alpha collector is accurate to within $\pm 10\%$ at fluences above $\sim 10^9$ alphas, providing an absolutely calibrated measurement to check alpha loss models and to cross-calibrate other detection methods. The lack of electronics and optics gives it good immunity to high neutron fluxes, and the use of a mass spectrometer in the analysis allows for positive ion identification. Although these features make the alpha collector an attractive diagnostic for future fusion reactors, several disadvantages may make other methods preferable. For instance, the alpha collector has no intrinsic time resolution, requires accessibility to retrieve the exposed foils and requires a long turn around time between exposure and analysis.

The alpha collector has been used to measure escaping alphas in $R = 2.45$ m plasmas for two discharges at a plasma current of 1.0 MA, and for two discharges at 1.8 MA. For the 1.0 MA discharges, the total alpha fluence, energy distribution, pitch angle distribution and radial distribution are all in good agreement with the first orbit loss model, and with the signals from the nearby 90° lost alpha scintillator detector, with the exception of a small anomalous loss feature at an energy below ~ 2 MeV. The results of the 1.8 MA discharges, however, display a large anomalous loss feature, in addition to first orbit loss, with an alpha fluence a factor of ~ 6 larger than that predicted by the first orbit loss model. This anomalous loss is broadly peaked at an energy of ~ 2.5 MeV. From this partial thermalization it can be inferred that this loss is 'delayed' with respect to alpha production by about one third of the energy e-folding time. The anomalous loss occurs for particles that are co-going at the detector and that are more trapped than the fattest banana orbit, and it exhibits a strong radial dependence which may be due to RF limiter shadowing or be an indication of a diffusive loss mechanism. The signals of the 90° scintillator detector dur-

ing these discharges, however, are in agreement with the first orbit loss model and do not display any sign of this anomalous loss.

The qualitative characteristics of the anomalous loss detected at 1.8 MA with the alpha collector probe are consistent with those of the 'delayed' loss feature identified in DD plasmas with the 90° scintillator detector [19]. This implies that they may be due to the same loss mechanism, although it is not understood why the anomalous loss does not appear on the scintillator detectors in DT.

The strong radial dependence of the anomalous loss, a factor of 3 decrease in measured fluence from the upper to the lower row of the collimating ports, suggests a radial diffusive process, which should cause a reduction in alpha flux due to scrape-off outside the radius of obstacles such as the RF limiters. However, to go from a marginally confined orbit, which just misses the outer midplane, to the anomalous loss orbit, which intercepts the detector, the alpha banana tip would have to jump at least 15 cm. Such a large step size results in very little radial variation over the 1.1 cm separation between the upper and lower rows of the collimating ports. If it is assumed that orbits exist that intercept the RF limiters at the bottom of the vessel first, rather than at the midplane, then a small step size of ~ 0.2 cm can account for the factor of 3 drop. However, such orbits require that the alpha energy be below the minimum detectable energy of ~ 0.5 MeV. Thus, there appears to be an inconsistency between the radial dependence and the diffusive step size required to bring an alpha to the detector, making it difficult to develop a model that accounts for the characteristics of the anomalous loss. The other possibility is that the lower row is partially in the shadow of the nearby RF limiter. A scan in the radial position of the probe would allow a conclusive result.

Several possible mechanisms have been considered in an attempt to explain the anomalous loss. The explanation that is most consistent with the observations is charge exchange loss, in which previously confined alpha orbits make a transition to prompt loss orbits as a result of electron capture from hydrogen-like carbon impurities. Further work is needed to quantify this loss mechanism and to determine if its effects should be evident to other escaping and confined alpha diagnostics. The most obvious approach is to develop a guiding centre Monte Carlo code to take into account the probabilities for charge exchange and reionization as a function of alpha energy and minor radius (since plasma and impurity density depend on

minor radius). However, the absence of the anomalous loss on the scintillator detectors and its radial dependence do not appear to be consistent with the large step size diffusion that would be associated with this loss process.

In the design of a fusion reactor it is necessary to be able to predict the alpha wall loading in order to prevent hot spots. Thus, the global alpha loss and its distribution to the first wall is more important than the loss to a localized detector. Unfortunately, it is difficult to make wall loading predictions based on the loss to a single detector. This is because the effective wall area (i.e. the area generated by projecting the trajectories of the detected particles onto the first wall as if they had not been stopped by the detector) of a given detector may vary widely between different types of alpha loss. Although the detected anomalous loss is significantly larger than the predicted first orbit loss, this loss may be preferentially concentrated in the detector (owing to a large effective wall area), resulting in a lower actual wall loading than might be expected. For instance, for a small step diffusive loss mechanism, the effective wall area generated by a detector positioned inside the RF limiter radius can be relatively large, since the detector can scrape off particles that would otherwise have spread over a large area owing to the randomization of the diffusion process.

Similarly, without knowing the loss mechanism, it is difficult to estimate the global alpha loss based on a localized detector, since this measurement provides no information regarding poloidal distribution. Assuming that the mechanism responsible for the anomalous loss is impurity charge exchange, then the gc-ORBIT code estimate of $\sim 20\%$ global loss from Refs [4, 5], which is ~ 8 times the first orbit loss prediction, can be taken as a 'best guess' of the upper limit of the global anomalous alpha loss. However, this may be a gross overestimate due to the potentially large uncertainties in the charge exchange cross-section and the method used to quantify this loss mechanism. As of now, no other diagnostic results have suggested the existence of such a loss. As for a lower limit to the global anomalous alpha loss, it is conceivable that this loss is very poloidally localized at the bottom of the vessel or that it is concentrated in the detector (due to a large effective wall area), resulting in an insignificant global loss in comparison with first orbit loss.

Further work might help in understanding the significance of this anomalous loss. Further modelling, particularly of the charge exchange loss

mechanism, might provide an explanation for the anomalous loss. Scans in plasma current, major radius, beam power and radial position could shed more light on the anomalous loss, and probe head design changes could improve the quality of the measurement. Such changes could include narrower collimating ports to improve pitch angle resolution, thinner nickel foils to improve energy resolution and programmable shutters over the foils to improve time resolution.

ACKNOWLEDGEMENTS

The authors are grateful to G. Lemunyan, M. Vocaturo, A. Brooks, D. Loesser, B. LeBlanc, K. Owens, D. Johnson, K. Young, K. McGuire and R. Hawryluk, as well as to the Health Physics Division at PPPL, for their assistance and support in the development of this diagnostic. We are also grateful to E. Synakowski, K. Hill, M. Herrmann and R. Heeter of PPPL, and T. Winter of Pennsylvania State University, for many useful discussions. This work was supported by USDOE Contract No. DE-AC02-76-CHO-3073, the Canadian Fusion Fuels Technology Project and the Natural Sciences and Engineering Research Council of Canada.

REFERENCES

- [1] ZWEBEN, S.J., et al., Nucl. Fusion **35** (1995) 893.
- [2] DARROW, D.S., et al., Rev. Sci. Instrum. **66** (1995) 476.
- [3] HERRMANN, H.W., et al., Rev. Sci. Instrum. **66** (1995) 351.
- [4] HERRMANN, H.W., et al., DT Results of TFTR's Alpha Collector Probe, Tech. Rep. PPPL-3214, Princeton Plasma Phys. Lab., NJ (1996).
- [5] HERRMANN, H.W., Anomalous Loss of DT Alphas in TFTR, Thesis to be submitted for PhD, Princeton Univ., 1997.
- [6] LANGLEY, R.A., Bull. Am. Phys. Soc. **29** (1984) 1309.
- [7] BASTASZ, R., et al., Rev. Sci. Instrum. **61** (1990) 3199.
- [8] CARRUTHERS, E.V., et al., J. Nucl. Mater. **176&177** (1990) 1027.
- [9] ZHU, J., et al., Nucl. Instrum. Methods **B59&60** (1991) 168.
- [10] ZIEGLER, J.F., BIERACK, J.P., LITTMARK, U., The Stopping and Range of Ions in Solids, Pergamon Press, Oxford (1985).

- [11] CHONG, G.P., et al., *Bull. Am. Phys. Soc.* **39** (1994) 1675.
- [12] CHONG, G.P., Measurement of Helium in Nickel Foils from the TFTR Alpha Collector Probe, Masters of Applied Science Thesis, Univ. of Toronto Inst. for Aerospace Studies (1995).
- [13] REDI, M.H., et al., *Nucl. Fusion* **35** (1995) 1191.
- [14] ZWEBEN, S.J., et al., *Nucl. Fusion* **30** (1990) 1551.
- [15] HEIDBRINK, W.W., SADLER, G.J., *Nucl. Fusion* **34** (1994) 535.
- [16] FELT, J., et al., *Rev. Sci. Instrum.* **61** (1990) 3262.
- [17] HAWRYLUK, R.J., et al., in *Physics of Plasmas Close to Thermonuclear Conditions* (Proc. Course Varenna, 1979), Vol. 1, CEC, Brussels (1980) 19.
- [18] CHOE, W., Princeton Plasma Phys. Lab., NJ, personal communication, 1996.
- [19] ZWEBEN, S.J., DARROW, D.S., FREDRICKSON, E.D., MYNICK, H.E., *Nucl. Fusion* **33** (1993) 705.
- [20] ZWEBEN, S.J., et al., *Rev. Sci. Instrum.* **63** (1992) 4565.
- [21] BOIVIN, R.L., ZWEBEN, S.J., WHITE, R.B., *Nucl. Fusion* **33** (1993) 449.
- [22] WANG, Shaojie, ZWEBEN, S.J., Model of Alpha Particle Diffusion in the Outer Limiter Shadow of TFTR, Tech. Rep. PPPL-3186, Princeton Plasma Phys. Lab., NJ (1996), submitted to *Nucl. Fusion*.
- [23] ZWEBEN, S.J., et al., *Phys. Plasmas* **1** (1994) 1469.
- [24] CHANG, C.S., et al., *Phys. Plasmas* **1** (1994) 3857.
- [25] GOLDSTON, R.J., et al., *Phys. Rev. Lett.* **47** (1983) 647.
- [26] WHITE, R.B., *Phys. Fluids B* **2** (1990) 845.
- [27] YAVORSKIJ, V., Inst. for Nuclear Research, Kiev, personal communication, 1996.
- [28] ZWEBEN, S.J., et al., in *Plasma Physics and Controlled Nuclear Fusion Research 1992* (Proc. 14th Int. Conf. Würzburg, 1992), Vol. 1, IAEA, Vienna (1993) 363.
- [29] MYNICK, H.E., WHITE, R.B., in *Theory of Fusion Plasmas* (Proc. Joint Varenna–Lausanne Int. Workshop Chexbres, 1988), Editrice Compositori, Bologna (1989) 385.
- [30] OLSON, R.E., *Phys. Lett.* **71A** (1979) 341.
- [31] HULSE, R.A., *Nucl. Technol. Fusion* **3** (1983) 259.
- [32] OLSON, R.E., *Phys. Rev. A* **16** (1977) 531.
- [33] WINTER, T.G., *Phys. Rev. A* **47** (1993) 264.
- [34] WINTER, T.G., Pennsylvania State Univ., Wilkes-Barre Campus, PA, personal communication, 1996.
- [35] HEETER, R.F., *Bull. Am. Phys. Soc.* **40** (1995) 1768.
- [36] PHANEUF, R.A., et al., *Atomic Data for Fusion*, Vol. 5, Rep. ORNL-6090, Oak Ridge Natl Lab., TN (1987).
- [37] INTERNATIONAL ATOMIC ENERGY AGENCY, *Handbook on Nuclear Activation Data*, Technical Report Series No. 273, IAEA, Vienna (1987) 261.

(Manuscript received 1 July 1996
 Final manuscript accepted 9 October 1996)

(E-mail address of H.W. Herrmann:
 hherrmann@pppl.gov)